



Workholding Evolved.

VOLUME 3

VICES - FIXTURES - QUICK CHANGE SYSTEMS



Maximum efficiency  
with 52mm



Reduce Setup and  
Changeover Time




Simple Modular  
Design



Solutions Available  
for 3, 4, & 5 Axis  
Machines


Small  
Vise

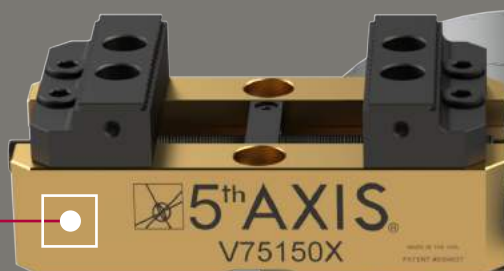

Top Tooling  
Fixture



Adapter

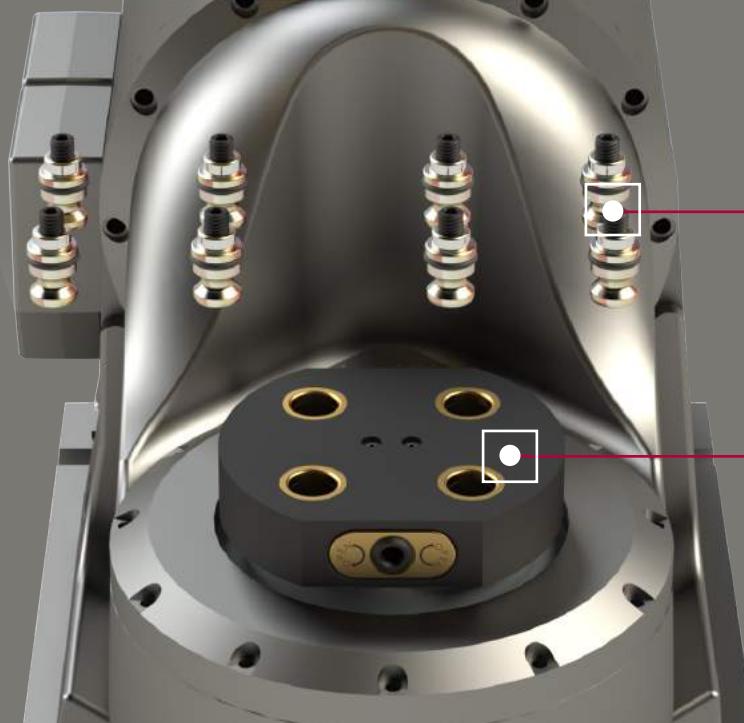

PS16F



Base



- Repeatability less than 8  $\mu\text{m}$
- Industry standard 52mm pull stud spacing
- Steel or aluminum body construction



**52mm Pull Stud Spacing**



**Robust Single Actuation Screw**



**Steel Locating Features**



Patented free float design ensures equal force on all 4 pull studs. Compatible with other 52mm 4 pull stud systems. Simply change out the pull studs to ensure that the manufacturer's base plate and pull studs match.


## Double Station Vises

| Part Number           | DV75150X-J1                                                                       | DV75150X-J2                                                                        | DV75150X-J3                                                                         |
|-----------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |  |
| Fixture Size          | 75mm x 150mm x 56mm                                                               | 75mm x 150mm x 64mm                                                                | 75mm x 150mm x 64mm                                                                 |
| Jaw Width             | 75mm                                                                              | 75mm                                                                               | 75mm                                                                                |
| Jaw Set               | Hardened Steel 3 Piece Master Jaw Set Serrated Dovetail                           | 6061 Aluminum Machinable Jaw Set                                                   | 1018 Steel Machinable Jaw Set                                                       |
| Vise Type             | Double Station                                                                    | Double Station                                                                     | Double Station                                                                      |
| Compatible Pull Studs | 4x PS16F (Sold seperately)                                                        | 4x PS16F (Sold seperately)                                                         | 4x PS16F (Sold seperately)                                                          |
| Additional Vise Specs | See Page 39                                                                       | See Page 39                                                                        | See Page 39                                                                         |

## Self-Centering Vises and Round Bar Fixture

| Part Number            | V75100X                                                                             | V75150X                                                                              | R52-CER40                                                                             |
|------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                        |  |  |  |
| Size                   | 75mm x 100mm x 56mm                                                                 | 75mm x 150mm x 56mm                                                                  | 75mm x 75mm x 68mm                                                                    |
| Jaw Width              | 75mm                                                                                | 75mm                                                                                 | Utilizes Standard ER40 Collet Nut                                                     |
| Fixture                | V75100X                                                                             | V75150X                                                                              | CER40                                                                                 |
| Overall Clamping Range | 0 - 76.3mm                                                                          | 0 - 128.8mm                                                                          | Accepts Only ER40 Size Collet                                                         |
| Vise Type              | Self-Centering                                                                      | Self-Centering                                                                       | Round Bar Fixture                                                                     |
| Compatible Pull Studs  | 4x PS16F (Sold seperately)                                                          | 4x PS16F (Sold seperately)                                                           | 4x PS16F (Included)                                                                   |
| Additional Vise Specs  | See Page 45                                                                         | See Page 45                                                                          | See Page 55                                                                           |

## Metric Dovetail Fixtures

| Part Number              | R52-DM12                                                                          | R52-2DM12                                                                         | R52-P12DM12                                                                         |
|--------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                          |  |  |  |
| Size                     | 75mm x 75mm x 51mm                                                                | 75mm x 75mm x 51mm                                                                | 126mm x 126mm x 134mm                                                               |
| Fixture                  | DM12                                                                              | 2x DM12                                                                           | 12x DM12                                                                            |
| Stock                    | 12mm and Above                                                                    | 12mm and Above                                                                    | 12mm and Above                                                                      |
| Compatible Pull Studs    | 4x PS16F (Included)                                                               | 4x PS16F (Included)                                                               | 4x PS16F (Included)                                                                 |
| Additional Fixture Specs | See Page 53                                                                       | See Page 53                                                                       | See Page 57                                                                         |

| Part Number              | R52-DM25                                                                            | R52-P4DM25                                                                          | R52-DM50                                                                              |
|--------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                          |  |  |  |
| Size                     | 75mm x 75mm x 55mm                                                                  | Ø152mm x 65mm                                                                       | 75mm x 75mm x 63mm                                                                    |
| Fixture                  | DM25                                                                                | 4x DM25                                                                             | DM50                                                                                  |
| Stock                    | 25mm and Above                                                                      | 25mm and Above                                                                      | 50mm and Above                                                                        |
| Compatible Pull Studs    | 4x PS16F (Included)                                                                 | 4x PS16F (Included)                                                                 | 4x PS16F (Included)                                                                   |
| Additional Fixture Specs | See Page 50                                                                         | See Page 53                                                                         | See Page 50                                                                           |

## Low Profile Adapters

| Part Number               | RL52A-4<br>RL52S-4                                                                | RL52A-4-96<br>RL52S-4-96                                                           | RL52A-4-TRT100                                                                      |
|---------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                           |  |  |  |
| Size                      | Ø116mm x 25mm                                                                     | Ø116mm x 25mm                                                                      | Ø116mm x 25mm                                                                       |
| Subcategory               | Low Profile Adapter                                                               | Low Profile Adapter                                                                | Low Profile Adapter                                                                 |
| Materials                 | Aluminum (RL52A-4) or Steel (RL52S-4)                                             | Aluminum (RL52A-4-96) or Steel (RL52S-4-96)                                        | Aluminum (RL52A-4-TRT100)                                                           |
| Mounting                  | Drill Your Own M10 @ 50mm-100mm                                                   | 2x M10 SHCS @ 96mm                                                                 | HAAS TRT 100                                                                        |
| Additional RockLock Specs | See Page 6                                                                        | See Page 6                                                                         | See Page 6                                                                          |

## Low Profile Adapters and Integrated Tombstone

| Part Number               | RL52A-44<br>RL52S-44                                                                | RL52A-4560<br>RL52S-4560                                                            | RL52A-A96                                                                            | RL52A-T31                                                                             |
|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                           |  |  |  |  |
| Size                      | 103.5mm x 103.5mm x 25mm                                                            | 122.0mm x 102.1mm x 25mm                                                            | 124.0mm x 124.0mm x 25mm                                                             | Ø160mm x 167mm                                                                        |
| Subcategory               | Low Profile Adapter                                                                 | Low Profile Adapter                                                                 | 96mm to 52mm Adapter                                                                 | 52mm Integrated Tombstone 96mm Base                                                   |
| Materials                 | Aluminum (RL52A-44) or Steel (RL52S-44)                                             | Aluminum (RL52A-4560) or Steel (RL52S-4560)                                         | Aluminum (RL52A-A96)                                                                 | Aluminum (RL52A-T31)                                                                  |
| Mounting                  | 2x SB1210 (Included) and 2x M12 or 1/2" @ Ø82mm 90°                                 | 4x M10 @ Ø116mm 60°                                                                 | 96mm Spacing and Includes 4x PS20F                                                   | 96mm Spacing and Includes 4x PS20F                                                    |
| Additional RockLock Specs | See Page 7                                                                          | See Page 7                                                                          | See Page 8                                                                           | See Page 8                                                                            |


## RL52A-4 / RL52S-4



**Size:** Ø116mm x 25mm  
**Bolt Pattern:** Drill Your Own Custom M10 @ 50mm-100mm  
**Material Construction:**  
 Aluminum (RL52A-4)  
 Steel (RL52S-4)

This circular RockLock adapter is built for small and medium sized rotaries and trunnions with 50mm to 100mm bolt circle.

Repeatability of +/- 8 µm.

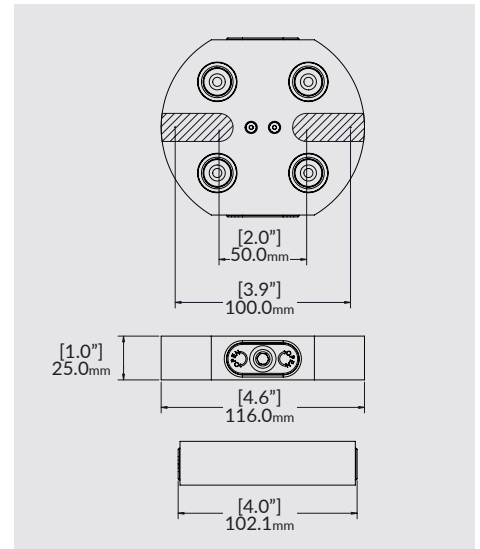


## RL52A-4-96 / RL52S-4-96



**Size:** Ø116mm x 25mm  
**Bolt Pattern:** 2x M10 SHCS @ 96mm  
**Material Construction:**  
 Aluminum (RL52A-4-96)  
 Steel (RL52S-4-96)

This circular RockLock adapter is built for small and medium sized rotaries and trunnions with 96mm bolt circle.

Repeatability of +/- 8 µm.

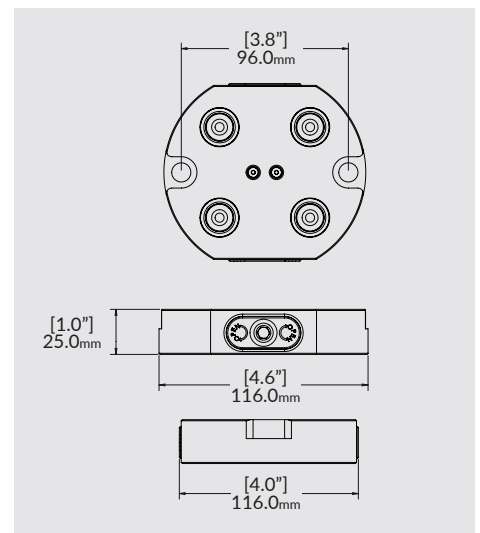


## RL52A-4-TRT100 **Size:** Ø116mm x 25mm **Bolt Pattern:** 2x 5/16" @ 82.98mm **Material Construction:** Aluminum (RL52A-4-TRT100)



This circular RockLock adapter is built for the Haas TRT100 trunnion.

Repeatability of +/- 8 µm.

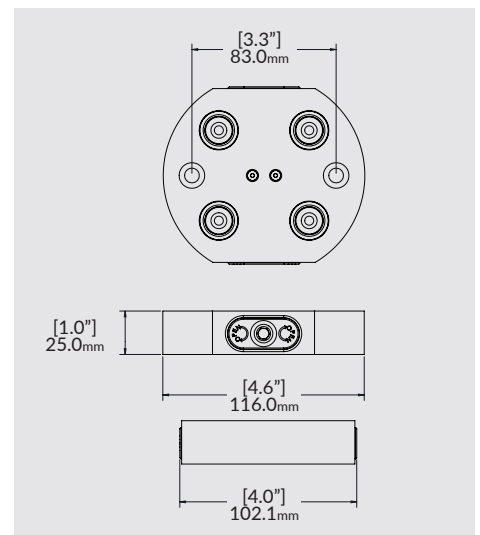



## RL52A-44 / RL52S-44



**Size:** 103.5mm x 103.5mm x 25mm

**Spacing:** 2x SB1210 (Included) and  
2x M12 or 1/2" @ Ø82mm 90°.  
Through hole Ø12.02mm

**Material Construction:**


Aluminum (RL52A-44)

Steel (RL52S-44)

This square low profile adapter is built for custom tombstones.

Ships with 2x shoulder bolts (SB1210) for locating.

Repeatability of +/- 8 µm.

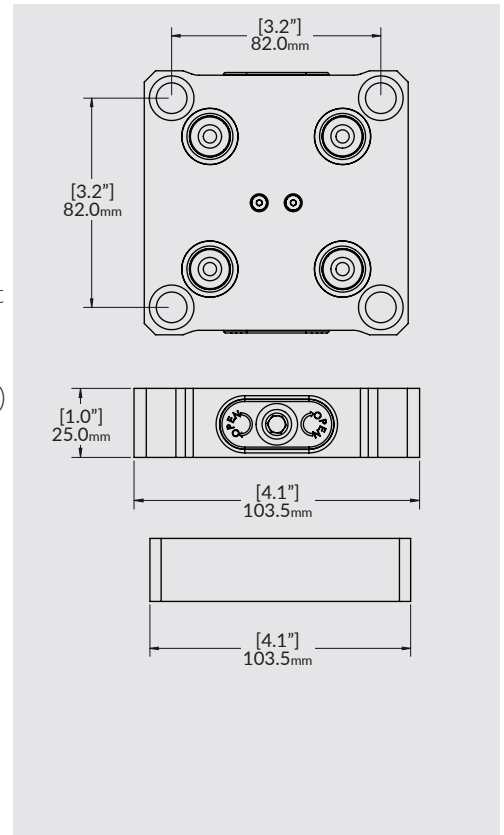

## RL52A-4560 / RL52S-4560



**Size:** 122.0mm x 102.1mm x 25.0mm

**Spacing:** 4x M10 @ Ø116mm

**Material Construction:**


Aluminum (RL52A-4560)

Steel (RL52S-4560)

This rectangular low profile adapter is built for small and medium sized rotaries with 60-degree T-slot spacing.

Ships with 2x rounded T-Slot nuts (14mm x M10) for maximum bolt circle capability.

Repeatability of +/- 8 µm.

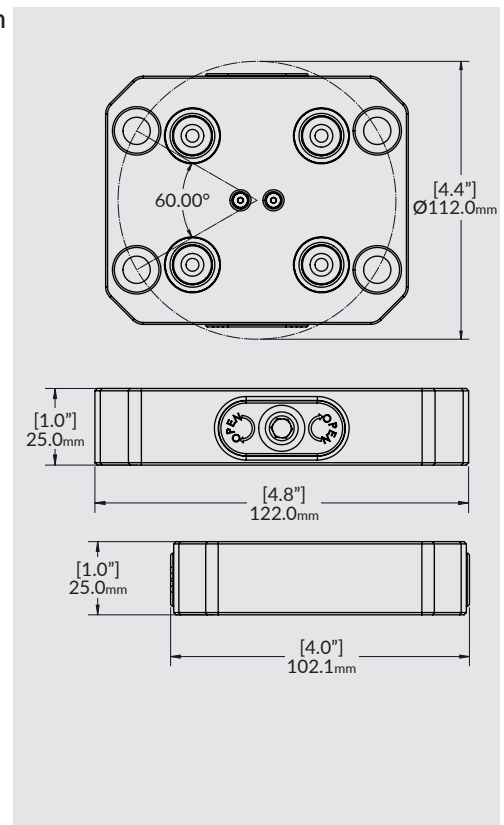



## RL52A-A96



**Size:** 124.0mm x 124.0mm x 25.0mm

**Bolt Pattern:** 96mm Spacing and Includes 4x PS20F


**Material Construction:** Aluminum (RL52A-A96)

The RL52A-A96 allows for the quick and easy conversion between the 96mm system and the 52mm system.

96mm spacing on the bottom of the unit and the integrated 52mm system on the top quickly adapts 52mm top tooling to the 96mm risers and adapters.

The unit includes 4x PS20F and 96mm RockLock pattern on the bottom for mounting to any RL96 base.

Repeatability of +/- 8 µm.

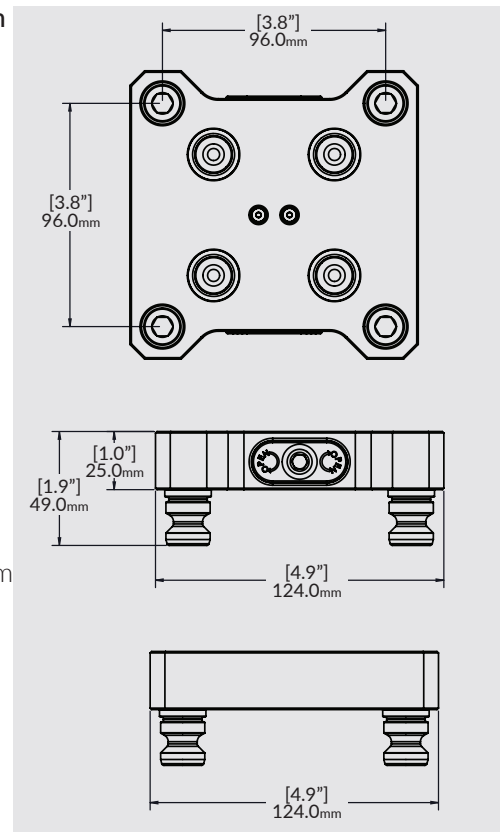

## RL52A-T31



**Size:** Ø160mm X 167.0mm

**Spacing:** Includes 4x PS20F


**Material Construction:** Aluminum (RL52A-T31)

This 3-sided integrated RockLock tombstone can be mounted onto any RL96 base.

52mm spacing on the 3 faces of the tombstone. 96mm spacing on the bottom of the tombstone.

4x PS20F are included.

Repeatability of +/- 8 µm.

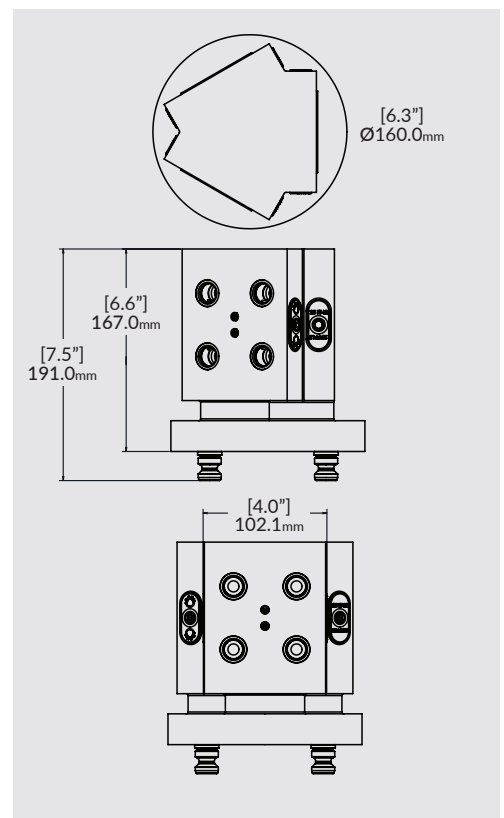



## PS16F

### PULL STUD

**Size:** 52mm Pull Studs

**Material Construction:** S7 Tool Steel

The PS16F is necessary to use any 5th Axis 52mm base. The 52mm spacing on 5th Axis vises and adapters allow for compatibility with other competitive systems.

\*Please note that pull studs must stay with the corresponding company's base plate. If you are using a 5th Axis 52mm RockLock base plate you will need 5th Axis pull studs (PS16F). The spacing and thread allows for the top tooling to be interchangeable between the competitive systems.



## PS16F-PY

### SINGLE PULL STUD WITH POKA-YOKE INSERT

**Size:** 52mm Pull Studs

**Material Construction:** S7 Tool Steel

Poka-yoke is a Japanese term that means "mistake-proofing" or "inadvertent error prevention". The PS16F-PY is a single modified pull stud with aluminum ring. The ring is placed inside one of the locating holes in the RockLock base, allowing for only the single poka-yoke pull stud to fit inside the locating hole with the corresponding ring. This will prevent operators from changing the orientation and misloading a part.



## PS16F-4PY

### PULL STUDS WITH POKA-YOKE INSERT

**Size:** 52mm Pull Studs

**Material Construction:** S7 Tool Steel

3x Standard PS16F Pull Studs and one Poka-Yoke (PS16F-PY).



## R52-BLANK

**Size:** 52mm Pull Studs

**Material Construction:** 6061 Aluminum

Blank 6061 aluminum block with 4x PS16F pull studs included. Quickly build your own fixture / subplate with the R52-Blank.



## R52-HTS

**Size:** 52mm Pull Studs

**Material Construction:** 6061 Aluminum

Quick change adapter for the Renishaw OTS Tool Setter. Accurately remove and relocate the tool probe when its not in use. The part number includes the adapter plate + 4x PS16F pull studs.

\*Requires any 52mm RockLock base unit.

\*\*Tool setter sold seperately.



## RL52-MP

**52mm Master Pallet**

**Size:** 52mm Pull Studs

**Material Construction:** 4140 Steel

Mount the RockLock base onto the machine, drop in the master pallet, dial in your setup, and torque your mounting bolts once you have reached the desired location. This is the fastest, most accurate way to set up the RockLock system. Use the bore to find center and the edge to set rotation.

See page 33 for more info.

Maximum efficiency  
with 96mm

**ROCKLOCK™**  
**QUICK CHANGE SYSTEM**



Reduce Setup and  
Changeover Time



Simple Modular  
Design



Solutions Available  
for 3, 4, & 5 Axis  
Machines

Vise



PS20F

Base

## ROCKLOCK™ QUICK CHANGE SYSTEM

- Repeatability less than 8  $\mu$ m
- Industry standard 96mm pull stud spacing
- Steel or aluminum body construction

96mm RockLock



**96mm Pull Stud Spacing**



**Robust Single Actuation Screw**



**Steel Locating Features**



Patented free float design ensures equal force on all 4 pull studs. Compatible with other 96mm 4 pull stud systems. Simply change out the pull studs to ensure that the manufacturer's base plate and pull studs match.

## RockLock 96mm Compatible Self-Centering Vises

| Part Number            | V552M                                                                             | V562M                                                                             | V510M                                                                              | V6105M                                                                              |
|------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                        |  |  |  |  |
| Size                   | 126mm x 127mm x 74mm                                                              | 126mm x 152mm x 74mm                                                              | 126mm x 254mm x 74mm                                                               | 150mm x 254mm x 94mm                                                                |
| Compatible Pull Studs  | 4x PS20F<br>(Sold separately)                                                     | 4x PS20F<br>(Sold separately)                                                     | 4x PS20F<br>(Sold separately)                                                      | 4x PS20F<br>(Sold separately)                                                       |
| Overall Clamping Range | 0 - 128.3mm                                                                       | 0 - 153.6mm                                                                       | 0 - 254.8mm                                                                        | 0 - 243.3mm                                                                         |
| Additional Vise Specs  | See Page 46                                                                       | See Page 46                                                                       | See Page 47                                                                        | See Page 47                                                                         |


| Part Number                 | R96-V75100X                                                                         | R96-2V75100X                                                                        | R96-V75150X                                                                         | R96-2V75150X                                                                         | R96-V75100T4                                                                          | R96-V75XT4                                                                            |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                             |  |  |  |  |  |  |
| Size                        | 125mm x 126mm x 88mm                                                                | 150mm x 177mm x 78mm                                                                | 126mm x 150mm x 88mm                                                                | 150mm x 177mm x 78mm                                                                 | 126mm x 126mm x 267mm                                                                 | 126mm x 126mm x 200mm                                                                 |
| Vise                        | V75100X                                                                             | 2x V75100X                                                                          | V75150X                                                                             | 2x V75150X                                                                           | Compatible with V75100X (Vises Sold Separately)                                       | Compatible with V75100X, V75150X, & DV75150X (Vises Sold Separately)                  |
| Vise Overall Clamping Range | 0 - 76.3mm                                                                          | N/A                                                                                 | 0 - 128.8mm                                                                         | N/A                                                                                  | N/A                                                                                   | N/A                                                                                   |
| Compatible Pull Studs       | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                  | 4x PS20F (Included)                                                                   | 4x PS20F (Included)                                                                   |
| Vise Type                   | Self-Centering                                                                      | Self-Centering                                                                      | Self-Centering                                                                      | Self-Centering                                                                       | Self-Centering                                                                        | Self-Centering or Double Station                                                      |
| Additional Vise Specs       | See Page 45                                                                         | See Page 45                                                                         | See Page 45                                                                         | See Page 45                                                                          | See Page 27                                                                           | See Page 27                                                                           |



## RockLock 96mm Double Station Vises





| Part Number           | R96-DV75150X-J1                                                                   | R96-2DV75150X-J1                                                                  | DV56-J1*                                                                          | DV510-J1*                                                                           | DV510-J4*                                                                           |
|-----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |  |  |  |
| Size                  | 126mm x 150mm x 88mm                                                              | 150mm x 177mm x 78mm                                                              | 126mm x 152mm x 73mm                                                              | 126mm x 258mm x 73mm                                                                | 126mm x 258mm x 73mm                                                                |
| Vise                  | DV75150X-J1                                                                       | 2x DV75150-J1                                                                     | DV56-J1                                                                           | DV510-J1                                                                            | DV510-J4                                                                            |
| Jaw Set               | Hardened Steel 3 Piece Master Jaw Set                                             | Hardened Steel 3 Piece Master Jaw Set                                             | Hardened Steel 3 Piece Master Jaw Set                                             | Hardened Steel 3 Piece Master Jaw Set with 2 inch center                            | Hardened Steel 3 Piece Master Jaw Set with 1 inch center                            |
| Compatible Pull Studs | 4x PS20F (Included)                                                               | 4x PS20F (Included)                                                               | 4x PS20F (Sold separately)                                                        | 4x PS20F (Sold separately)                                                          | 4x PS20F (Sold separately)                                                          |
| Vise Type             | Double Station                                                                    | Double Station                                                                    | Fixed Jaw / Double Station                                                        | Fixed Jaw / Double Station                                                          | Fixed Jaw / Double Station                                                          |
| Additional Vise Specs | See Page 39                                                                       | See Page 39                                                                       | See Page 40                                                                       | See Page 41                                                                         | See Page 41                                                                         |

96mm RockLock



| Part Number           | R96-DV75150X-J2                                                                     | R96-2DV75150X-J2                                                                    | DV56-J2*                                                                            | DV510-J2*                                                                           | R96-DV75150X-J3                                                                     | R96-2DV75150X-J3                                                                      | DV56-J3*                                                                              | DV510-J3*                                                                             |
|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |  |  |  |  |  |
| Size                  | 126mm x 151mm x 88mm                                                                | 150mm x 177mm x 78mm                                                                | 126mm x 152mm x 89mm                                                                | 126mm x 258mm x 89mm                                                                | 126mm x 151mm x 88mm                                                                | 150mm x 177mm x 78mm                                                                  | 126mm x 152mm x 89mm                                                                  | 126mm x 258mm x 89mm                                                                  |
| Vise                  | DV75150-J2                                                                          | 2x DV75150-J2                                                                       | DV56-J2                                                                             | DV510-J2                                                                            | DV75150-J3                                                                          | 2x DV75150-J3                                                                         | DV56-J3                                                                               | DV510-J3                                                                              |
| Jaw Set               | 6061 Aluminum Soft Jaw Set                                                          | 6061 Aluminum Soft Jaw Set                                                          | 6061 Aluminum Soft Jaw Set                                                          | 6061 Aluminum Soft Jaw Set                                                          | 1018 Steel Machinable Jaws                                                          | 1018 Steel Machinable Jaws                                                            | 1018 Steel Machinable Jaws                                                            | 1018 Steel Machinable Jaws                                                            |
| Compatible Pull Studs | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                 | 4x PS20F (Sold separately)                                                          | 4x PS20F (Sold separately)                                                          | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                   | 4x PS20F (Sold separately)                                                            | 4x PS20F (Sold separately)                                                            |
| Vise Type             | Double Station                                                                      | Double Station                                                                      | Double Station                                                                      | Double Station                                                                      | Double Station                                                                      | Double Station                                                                        | Double Station                                                                        | Double Station                                                                        |
| Additional Vise Specs | See Page 39                                                                         | See Page 39                                                                         | See Page 40                                                                         | See Page 42                                                                         | See Page 39                                                                         | See Page 39                                                                           | See Page 40                                                                           | See Page 42                                                                           |



## Dovetail Fixtures

| Part Number              | R96-DM12                                                                          | R96-2DM12                                                                         | R96-P12DM12                                                                        | R96-DM25                                                                            |
|--------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                          |  |  |  |  |
| Size                     | 126mm x 126mm x 67mm                                                              | 126mm x 126mm x 67mm                                                              | 126mm x 126mm x 133mm                                                              | 126mm x 126mm x 75mm                                                                |
| Fixture                  | DM12                                                                              | 2x DM12                                                                           | 12x DM12                                                                           | DM25                                                                                |
| Stock Size               | 12mm and Above                                                                    | 12mm and Above                                                                    | 12mm and Above                                                                     | 25mm and Above                                                                      |
| Compatible Pull Studs    | 4x PS20F (Included)                                                               | 4x PS20F (Included)                                                               | 4x PS20F (Included)                                                                | 4x PS20F (Included)                                                                 |
| Additional Fixture Specs | See Page 50                                                                       | See Page 50                                                                       | See Page 53                                                                        | See Page 50                                                                         |

## Dovetail Fixtures

| Part Number              | R96-P4DM25                                                                          | R96-DM50                                                                            | R96-D115T41                                                                         | R96-CER40                                                                             |
|--------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                          |  |  |  |  |
| Size                     | Ø152mm x 65mm                                                                       | 126mm x 126mm x 76mm                                                                | 126mm x 126mm x 107mm                                                               | 126mm x 126mm x 81mm                                                                  |
| Fixture                  | 4x DM25                                                                             | DM50                                                                                | 4x D115<br>*Fixtures sold separate*                                                 | CER40                                                                                 |
| Stock Size               | 25mm and Above                                                                      | 50mm and Above                                                                      | 25mm and Above                                                                      | Utilizes Standard ER40 Collet Nut                                                     |
| Compatible Pull Studs    | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                 | 4x PS20F (Included)                                                                   |
| Additional Fixture Specs | See Page 53                                                                         | See Page 50                                                                         | See Page 28                                                                         | See Page 55                                                                           |

## Low Profile Bases


| Part Number               | RL96A-56<br>RL96S-56                                                              | RL96A-6760<br>RL96S-6760                                                          | RL96A-6790<br>RL96S-6790                                                          | RL96A-67<br>RL96S-67                                                              | RL96S-67M                                                                          | RL96A-60100<br>RL96S-60100                                                          | RL96A-66<br>RL96S-66                                                                |
|---------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                           |  |  |  |  |  |  |  |
| Size                      | 158mm x 126mm x 30mm                                                              | 174mm x 158mm x 30mm                                                              | 156mm x 158mm x 30mm                                                              | 158mm x 176mm x 30mm                                                              | 158mm x 176mm x 30mm                                                               | 158mm x 150mm x 30mm                                                                | 158mm x 150mm x 30mm                                                                |
| Subcategory               | Low Profile Adapter                                                               | Low Profile Adapter                                                               | Low Profile Adapter                                                               | Low Profile Adapter                                                               | Low Profile Adapter                                                                | Low Profile Adapter                                                                 | Low Profile Adapter                                                                 |
| Materials                 | Aluminum (RL96A-56) or Steel (RL96S-56)                                           | Aluminum (RL96A-6760) or Steel (RL96S-6760)                                       | Aluminum (RL96A-6790) or Steel (RL96S-6790)                                       | Aluminum (RL96A-67) or Steel (RL96S-67)                                           | Steel (RL96S-67M)                                                                  | Aluminum (RL96A-60100) or Steel (RL96S-60100)                                       | Aluminum (RL96A-66) or Steel (RL96S-66)                                             |
| Mounting                  | 2x M12 SHCS @ 100mm - 101.6mm                                                     | 4x M12 @ Ø170.0mm 60°                                                             | 4x M10 @ Ø184.5mm 90°                                                             | 4x 1/2" SB @ 6.0" x 4.0"                                                          | 4x M12 SB @ 150mm x 100mm                                                          | 4x M10 @ Ø100mm 90°                                                                 | Drill your own mounting holes                                                       |
| Additional RockLock Specs | See Page 18                                                                       | See Page 18                                                                       | See Page 19                                                                       | See Page 19                                                                       | See Page 19                                                                        | See Page 20                                                                         | See Page 20                                                                         |

96mm RockLock

## Risers

| Part Number               | RL96A-38                                                                            | RL96A-411                                                                           | RL96A-3915                                                                           | RL96A-4816                                                                                         |
|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                           |  |  |  |               |
| Size                      | Ø 201.9mm x 75.0mm                                                                  | Ø 276mm x 100mm                                                                     | 381mm x 230mm x 80mm                                                                 | 400mm x 200mm x 100mm                                                                              |
| Subcategory               | Single Position Riser                                                               | Single Position Riser                                                               | Multi-Position Riser                                                                 | Multi-Position Riser                                                                               |
| Materials                 | Aluminum (RL96A-38)                                                                 | Aluminum (RL96A-411)                                                                | Aluminum (RL96A-3915)                                                                | Aluminum (RL96A-4816)                                                                              |
| Mounting                  | 4x M12 bolts @ 90° on Ø 178.0mm or 3x M12 bolts @ 120° on Ø 178.0mm                 | 4x M12 bolts @ 90° on Ø 9.92"                                                       | 4x M16 bolts @ 200mm square                                                          | 4x M12 @ 320mm x 160mm rectangle (80mm T-slots) or 4x M16 @ 360mm x 126mm rectangle (63mm T-slots) |
| Additional RockLock Specs | See Page 21                                                                         | See Page 21                                                                         | See Page 22                                                                          | See Page 22                                                                                        |

## Multi-Position Plates

| Part Number               | RL96A-3613S1                                                                      | RL96A-3613S2                                                                       | RL96A-3613S3                                                                        |
|---------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                           |  |  |  |
| Size                      | 158mm x 338mm x 30mm                                                              | 158mm x 338mm x 30mm                                                               | 158mm x 338mm x 30mm                                                                |
| Subcategory               | Multi-Position Horizontal Plate                                                   | Multi-Position Horizontal Plate                                                    | Multi-Position Horizontal Plate                                                     |
| Materials                 | Aluminum (RL96A-3613S1)                                                           | Aluminum (RL96A-3613S2)                                                            | Aluminum (RL96A-3613S3)                                                             |
| Mounting                  | 2x M12 SHCS @ 96mm or 250mm                                                       | 4x M12 SHCS<br>Equally Spaced @ 80mm                                               | 4x M12 SHCS<br>Equally Spaced @ 100mm                                               |
| Additional RockLock Specs | See Page 23                                                                       | See Page 23                                                                        | See Page 23                                                                         |

## Tombstones, Right Angle Plate, and Single Position Riser

| Part Number               | RL96A-3002<br>RL96S-3002                                                            | RL96A-3003<br>RL96S-3003                                                            | RL96A-90DEG                                                                          | RL96A-356*<br>RL96S-356*                                                              |
|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                           |  |  |  |  |
| Size                      | 300mm x 300mm x 400mm                                                               | 300mm x 300mm x 400mm                                                               | 149.4mm x<br>158mm x 200mm                                                           | 158mm x 126mm x 75mm                                                                  |
| Subcategory               | 96mm Integrated Tombstone                                                           | 96mm Integrated Tombstone                                                           | Right Angle Plate                                                                    | Single Position Riser                                                                 |
| Materials                 | Aluminum (RL96A-3002) or<br>1018 Steel (RL96S-3002)                                 | Aluminum (RL96A-3003) or<br>1018 Steel (RL96S-3003)                                 | Aluminum (RL96A-90DEG)                                                               | Aluminum (RL96A-356) or<br>Steel (RL96S-356)                                          |
| Mounting                  | Machine Specific*                                                                   | Machine Specific*                                                                   | 4x PS20F (Included) or<br>2x M12 SHCS @ 100mm -<br>101.6mm (4")                      | 4x PS20F<br>(Included)                                                                |
| Additional RockLock Specs | See Page 25                                                                         | See Page 25                                                                         | See Page 26                                                                          | See Page 26                                                                           |

## RL96A-56 / RL96S-56




**Size:** 158mm x 126mm x 30mm

**Spacing:** 2x M12 SHCS @ 100mm - 101.6mm

**Material Construction:**  
Aluminum (RL96A-56)  
Steel (RL96S-56)

The adapter has two enlarged counterbores to allow mounting from 100mm to 101.6mm for M12 or 1/2-13 SHCS for simple mounting to T-slots.

Repeatability of +/- 8 µm.

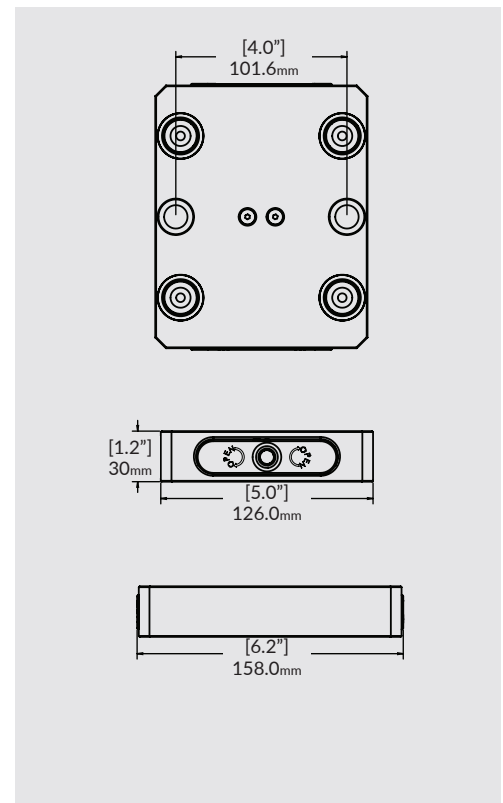

96mm RockLock

## RL96A-6760 / RL96S-6760



**Size:** 174mm x 158mm x 30mm


**Spacing:** 4x M12 @ Ø170.0mm on 60°

**Material Construction:**  
Aluminum (RL96A-6760)  
Steel (RL96S-6760)

The RL96-6760 series quick change adapter was built for the Haas TR-210 series rotaries, Hurco VMX30 series rotaries, and any other rotary with 60 degree radial T-slots.

A quick turn of the wrench actuates the cam mechanism to lock and release your fixtures and vises for fast changeover.

Repeatability of +/- 8 µm.

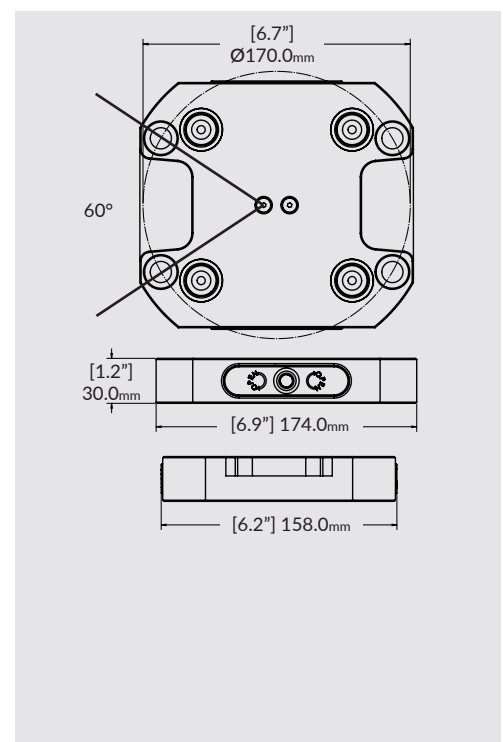

## RL96A-6790 / RL96S-6790




**Size:** 156mm x 158mm x 30mm  
**Spacing:** 4x M10 @ Ø184.5mm  
**Material Construction:**  
 Aluminum (RL96A-6790)  
 Steel (RL96S-6790)

The RL96-6790 quick change adapter was built for any rotary with 90 degree radial T-slots.

A quick turn of the wrench actuates the cam mechanism to lock and release your fixtures and vises for fast changeover.

Repeatability of +/- 8 µm.

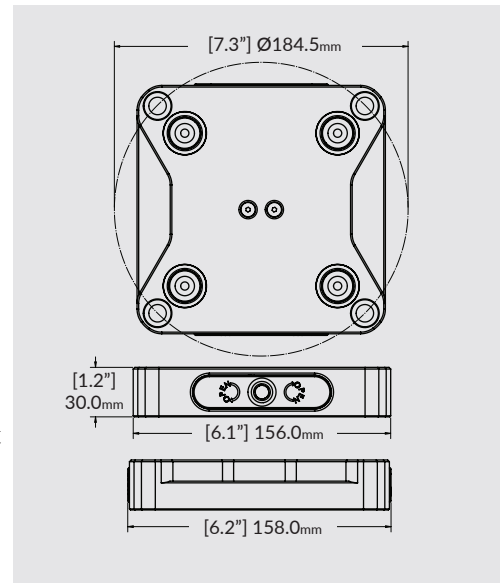

## RL96A-67 / RL96S-67




**Size:** 158.0mm x 176.0mm x 30mm  
**Spacing:** 4x 1/2" SB @ 6.0" x 4.0".  
 Through hole Ø0.501"  
**Material Construction:**  
 Aluminum (RL96A-67)  
 Steel (RL96S-67)

The RL96-67 was built specifically for horizontal machining centers.

Bolt pattern 6.0" x 4.0" allows for easy mounting to most standard tombstone grid pattern spacing.

Repeatability of +/- 8 µm.

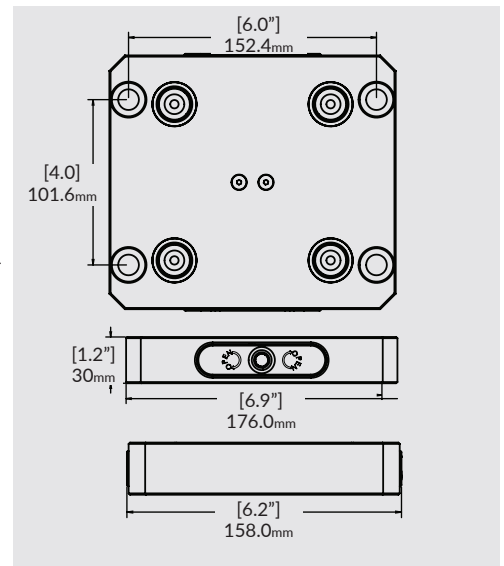

## RL96S-67M




**Size:** 158.0mm x 176.0mm x 30mm  
**Spacing:** 4x M12 @ 150.0mm x 100.0mm. Through hole Ø12.02mm  
**Material Construction:**  
 Steel (RL96S-67)

The RL96-67M was built specifically for tombstones on horizontal machining centers.

Bolt pattern 150mm x 100mm allows for easy mounting to most standard tombstone grid pattern spacing.

Repeatability of +/- 8 µm.

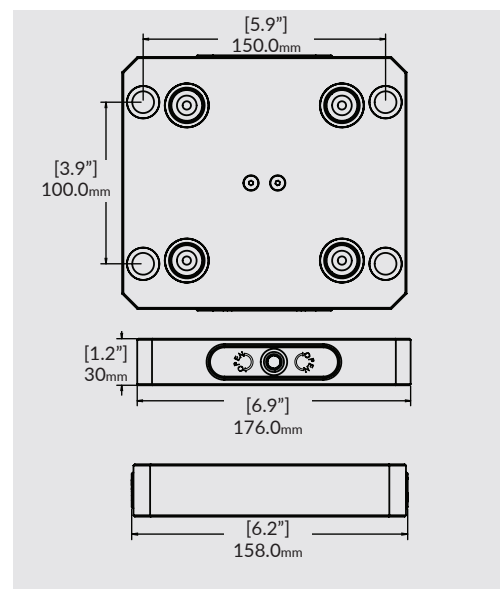

## RL96A-60100 / RL96S-60100



**Size:** 158mm x 150mm x 30mm

**Spacing:** 4x 100mm


**Material Construction:**

Aluminum (RL96A-60100)

Steel (RL96S-60100)

The RL96-60100 series quick change adapter was built with 4x counterbores @ 100mm spacing. Fitments include the new Haas TRT160 and many others.

Repeatability of +/- 8 µm.

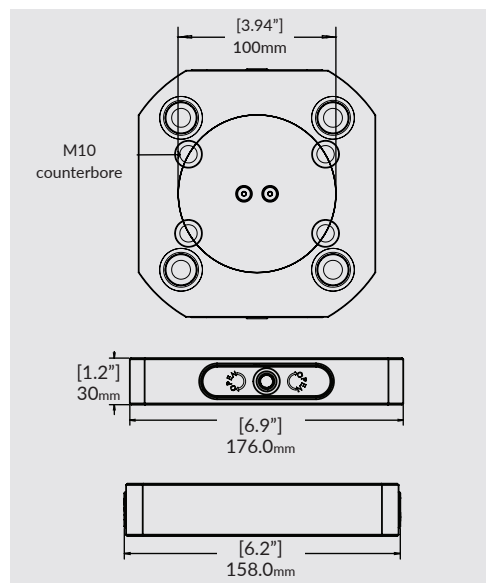

## RL96A-66/ RL96S-66



**Size:** 158mm x 150mm x 30mm

**Spacing:** Drill your own


**Material Construction:**

Aluminum (RL96A-66)

Steel (RL96S-66)

The RL96-66 series quick change adapter was built to accommodate a variety of machines that are not in our standard offering. The blank adapter allows for drilling your own mounting holes.

Repeatability of +/- 8 µm.

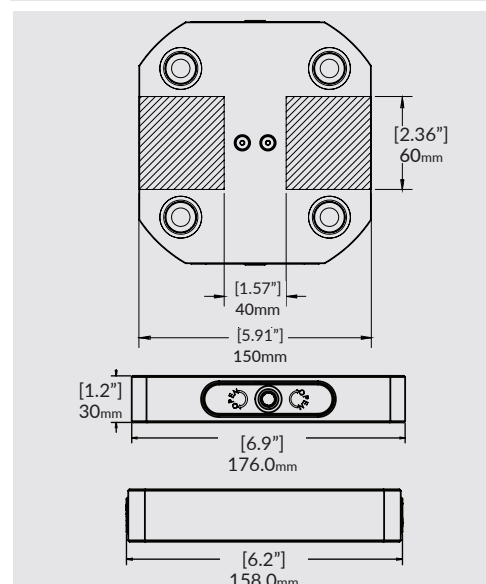

## RL96A-DDR / RL96S-DDR



**Size:** 150mm x 158mm x 34.5mm

**Spacing:** Specific to DDR


**Material Construction:**

Aluminum (RL96A-DDR)

Steel (RL96S-DDR)

The RL96-DDR was built for the Fanuc DDR rotary table.

Repeatability of +/- 8 µm.

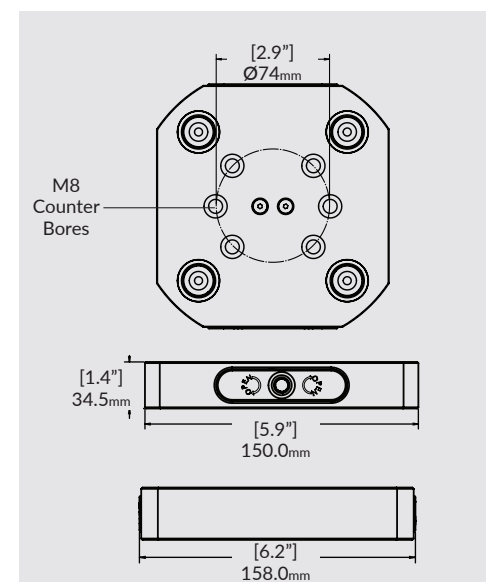



## RL96A-38



**Size:** Ø 201.9mm x 75.0mm

**Spacing:**

4x or M12 bolts @ 90° on Ø 78mm or

3x M12 bolts @ 120° on Ø 178mm

**Material Construction:**


Aluminum (RL96A-38)

The RL96A-38 series quick change adapter was built for medium sized rotaries and smaller 5 axis machines (~300 mm range).

With bolt patterns at 60 degrees and 90 degrees this adapter is flexible and fits on a majority of the most popular rotaries and 5 axis tables on the market.

The 3" overall height makes it ideal for those smaller parts that you want to get off the table.

Repeatability of +/- 8 µm.

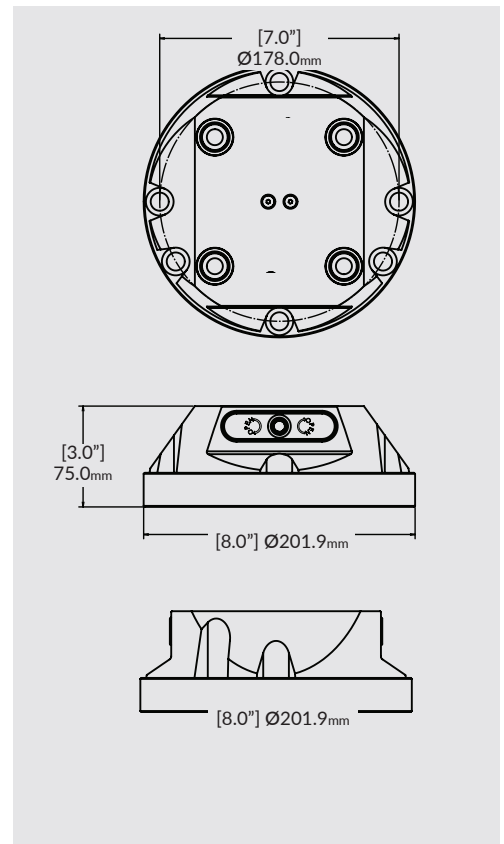

## RL96A-411



**Size:** Ø 276mm x 100mm

**Spacing:**

4x 1/2-13 or M12 bolts @ 90° on Ø 252.0mm or

3x 1/2-13 or M12 bolts @ 120° on Ø 252mm


**Material Construction:**

Aluminum (RL96A-411)

The RL96A-411 is an integrated RockLock riser built into one of our most popular adapters.

The 11" diameter adapter x 4" overall height is ideal for medium to large 5 axis machines like the DMG Mori DMU50 and DMU60 as well as the Haas UMC-750 and UMC-750SS.

Repeatability of +/- 8 µm.

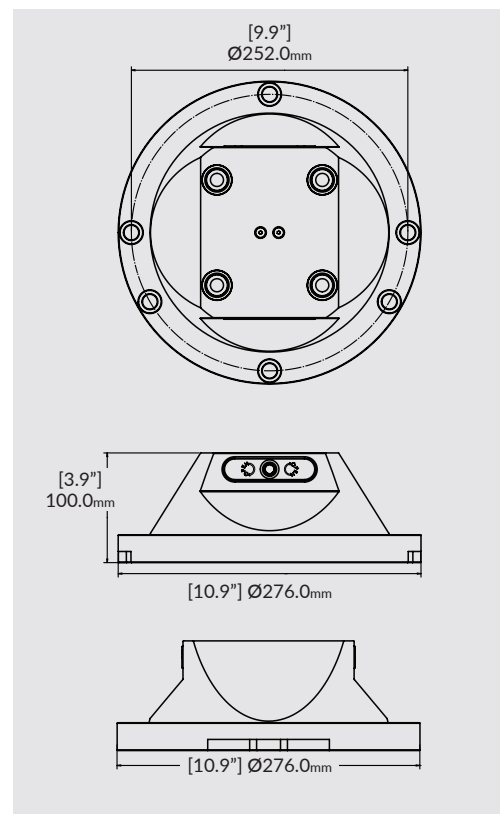

## RL96A-3915




**Size:** 381mm x 230mm x 80mm  
**Spacing:** 4x M16 bolts @ 200mm square  
**Material Construction:**  
 Aluminum (RL96A-3915)

The RL96A-3915 was built with larger machines in mind (400mm-500mm tables).

Utilize one singular large vise or accommodate two smaller workholding units to maximize machine efficiency and reduce changeover time.

Repeatability of +/- 8 µm.

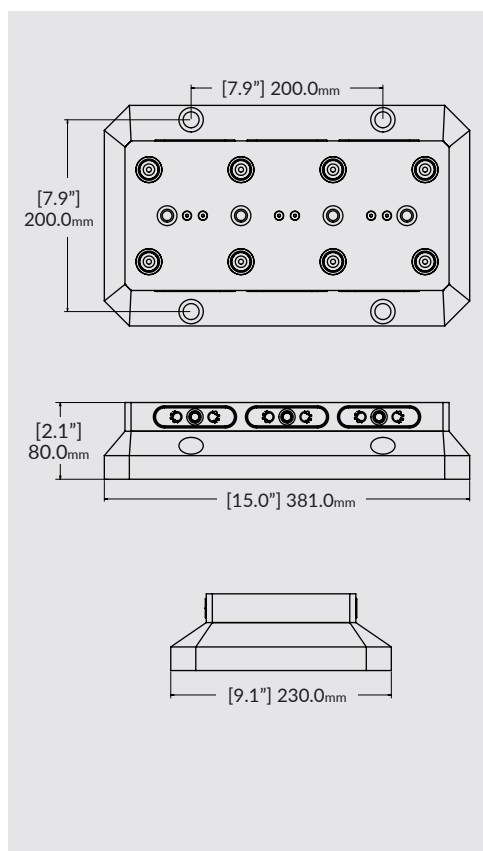

96mm RockLock

## RL96A-4816




**Size:** 400mm x 200mm x 100mm  
**Spacing:**  
 4x M12 @ 320mm x 160mm rectangle (80mm T-slots) or  
 4x M16 @ 360mm x 126mm rectangle (63mm T-slots)  
**Material Construction:**  
 Aluminum (RL96A-4816)

The RL96A-4816 is an integrated multi-position RockLock riser built into one of the largest adapters in the product line.

Utilize one large vise or accommodate two smaller vises with this riser.

Repeatability of +/- 8 µm.

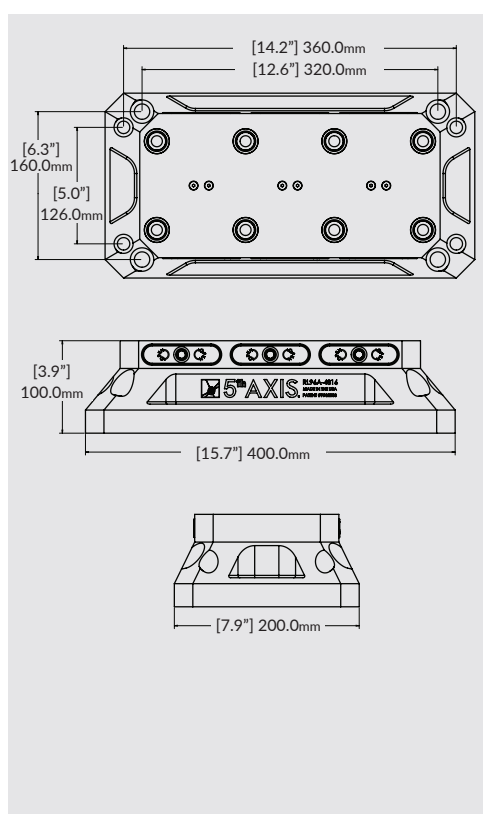


## RL96A-3613S1




**Size:** 158mm x 338mm x 30mm  
**Spacing:** 2x M12 SHCS @ 96mm or 250mm  
**Material Construction:**  
 Aluminum (RL96A-3613S1)

The RL96A-3613S1 is a multi-position RockLock plate built for maximum efficiency on small to medium vertical mills. The nested RockLock 96mm pattern allows for the operator to utilize one single large vise or two smaller vises. 125mm T-slot spacing for 3-axis mills.  
 Repeatability of +/- 8 µm.

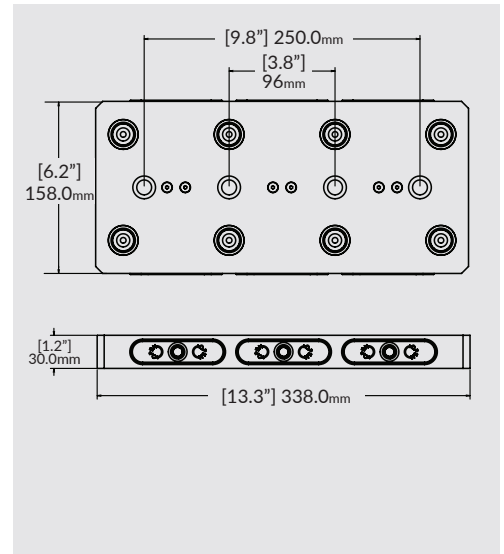


## RL96A-3613S2



**Size:** 158mm x 338mm x 30mm  
**Spacing:** 4x M12 SHCS Equally Spaced @ 80mm  
**Material Construction:**  
 Aluminum (RL96A-3613S2)

The RL96A-3613S2 is a multi-position RockLock plate built for maximum efficiency on small to medium vertical mills. The nested RockLock 96mm pattern allows for the operator to utilize one single large vise or two smaller vises. 80mm T-slot spacing for 3 axis mills.  
 Repeatability of +/- 8 µm.

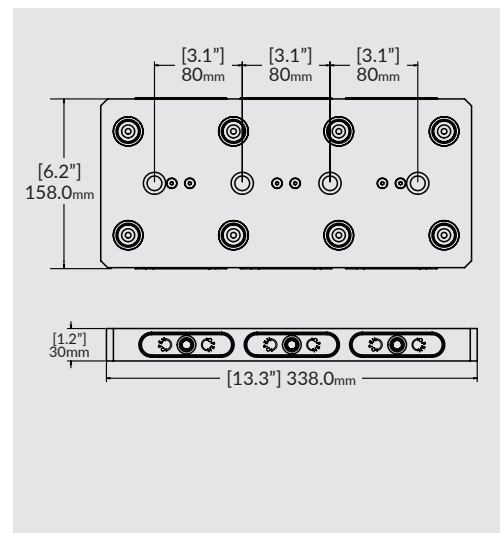


## RL96A-3613S3




**Size:** 158mm x 338mm x 30mm  
**Spacing:** 4x M12 SHCS Equally Spaced @ 100mm  
**Material Construction:**  
 Aluminum (RL96A-3613S3)

The RL96A-3613S3 is a multi-position RockLock plate built for maximum efficiency on small to medium vertical mills. The nested RockLock 96mm pattern allows for the operator to utilize one single large vise or two smaller vises. 100mm T-slot spacing for 3 axis mills.  
 Repeatability of +/- 8 µm.

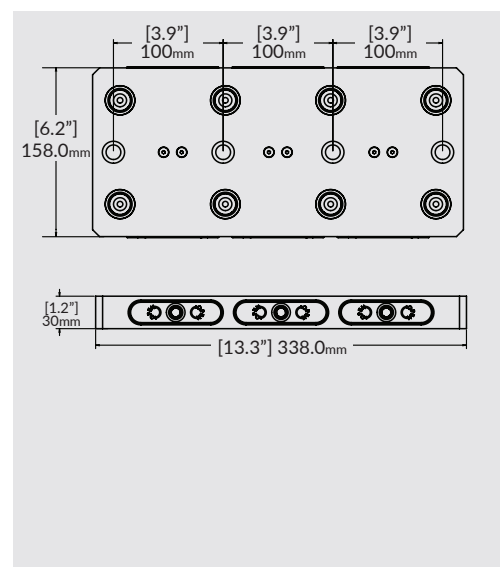


**More Parts Per Cycle = More Profit**  
**Profitability Through Efficiency**

**3 Parts Per Cycle**

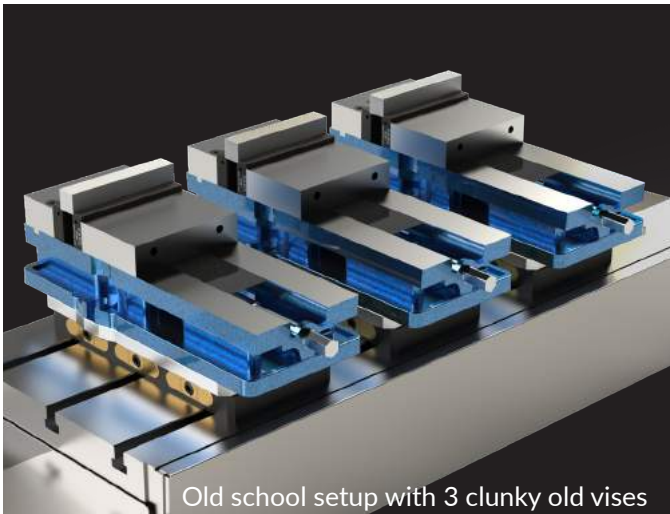


Old school setup with 3 clunky old vises

**6 Parts Per Cycle**

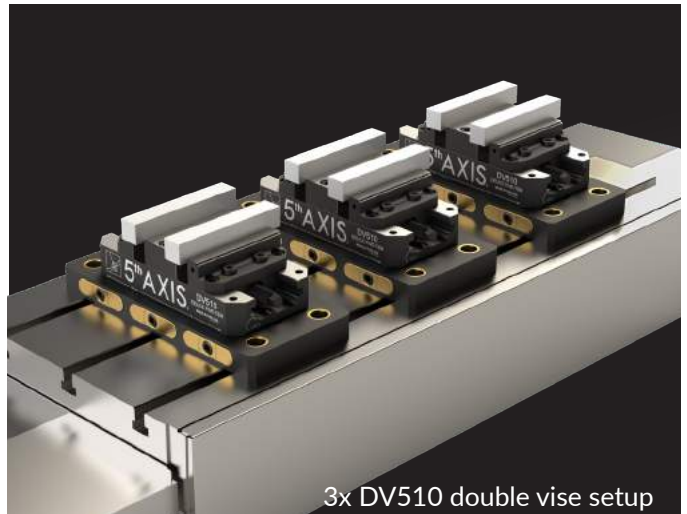


3x DV510 double vise setup

**12 Parts Per Cycle**

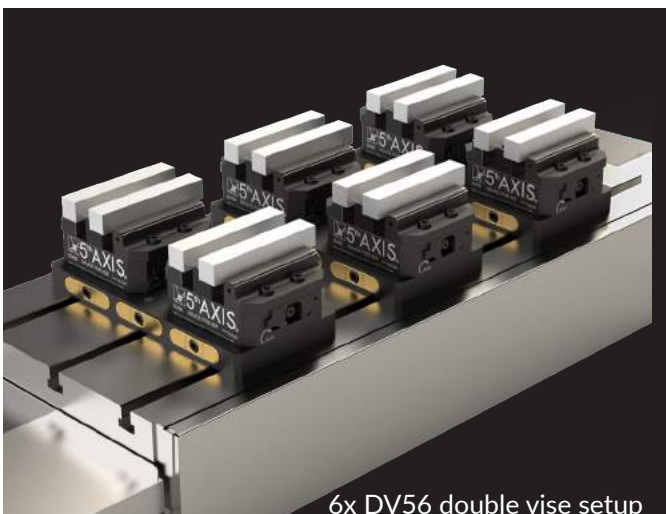

6x DV56 double vise setup

**24 Parts Per Cycle**

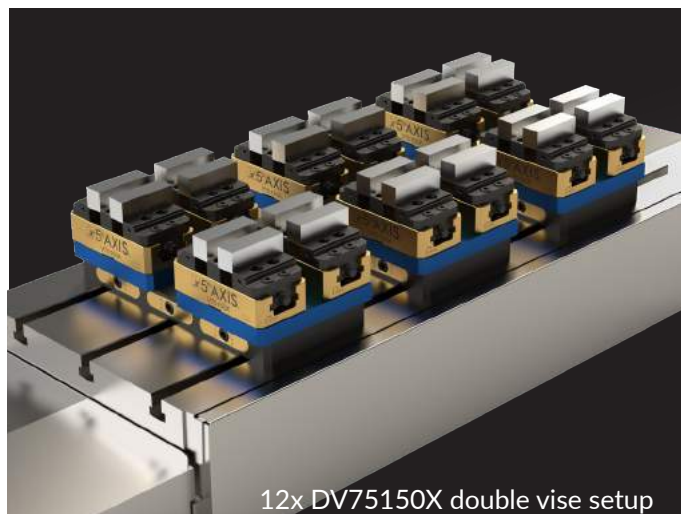

12x DV75150X double vise setup

## RL96A-3002 / RL96S-3002



**Size:** 300mm x 300mm x 400mm

**Spacing:** Custom


**Material Construction:**

Aluminum (RL96A-3002)

Steel (RL96S-3002)

This two sided 300mm tombstone integrates the RockLock 96mm quick change system. This tombstone is perfect for mid-sized 5 Axis machines. It is also a perfect fit for 300mm horizontal machining centers offered by Kitamura and Kitagawa. Tombstones can be ordered in aluminum or steel construction. All units feature hardened steel internals and locating features. All tombstones are built to order, and the base plate is customized to your machine table or pallet specs.

Repeatability of +/- 8  $\mu$ m.

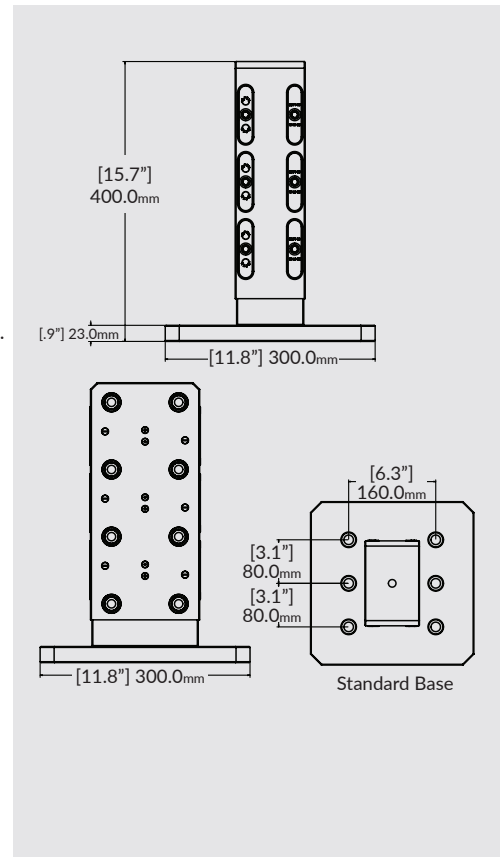

## RL96A-3003 / RL96S-3003



**Size:** 300mm x 300mm x 400mm

**Spacing:** Custom


**Material Construction:**

Aluminum (RL96A-3003)

Steel (RL96S-3003)

This three sided 300mm tombstone integrates the RockLock 96mm quick change system. This tombstone is perfect for mid sized 5 Axis machines. It is also a perfect fit for 300mm horizontal machining centers offered by Kitamura and Kitagawa. Tombstones can be ordered in aluminum or steel construction. All units feature hardened steel internals and locating features. All tombstones are built to order, and the base plate is customized to your machine table or pallet specs.

Repeatability of +/- 8  $\mu$ m.

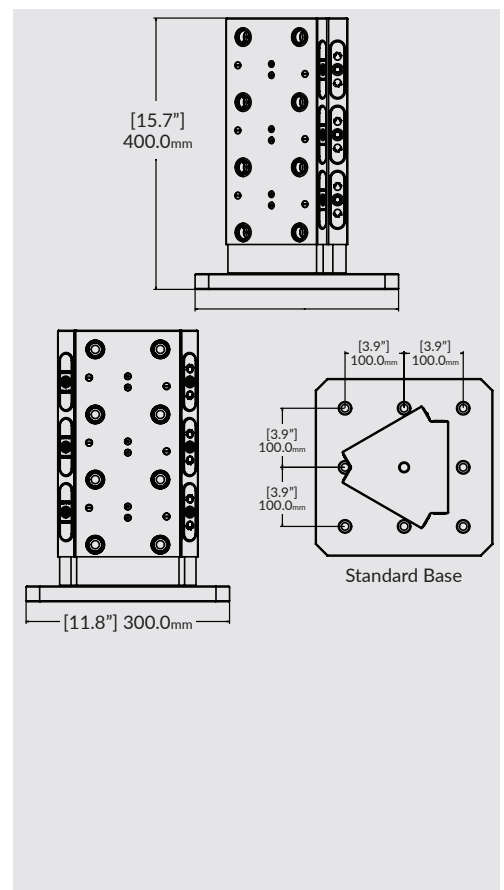



## RL96A-90DEG



**Size:** 149.4mm x 158mm x 200mm


**Spacing:** RockLock PS20F or  
2x M12 SHCS @  
100mm - 101.6mm

**Material Construction:**  
Aluminum (RL96A-90DEG)

The 90° right angle RockLock plate is the perfect low cost solution for multi-side machining. **Machine 5 sides of a part without a 5-axis machine.** The unit features pull studs on the bottom so that it can be mounted onto any 96mm RockLock plate. It also has 2 counter bores for traditional mounting to machine T-slots at 4" or 100mm.

Simply machine your material, unlock the system, rotate the material, lock the system and continue machining.

Includes 4x PS20F.  
Repeatability of +/- 8 µm..

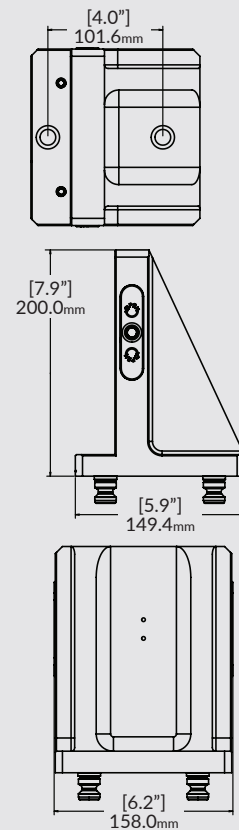

## RL96A-356 / RL96S-356



**Size:** 158mm x 126mm x 75mm

**Spacing:** RockLock PS20F 96mm


**Material Construction:**  
Aluminum (RL96A-356)  
Steel (RL96S-356)

Built to give extra rise from any RockLock bases.

The profile was created as small as possible to reduce any interference.

Includes 4x PS20F.

Repeatability of +/- 8 µm.

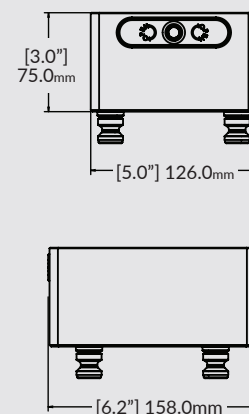

## R96-V75100T4



\*Vises sold separately


**Size:** 125.7mm x 125.7mm x 266.7mm

**Mounting:** RockLock PS20F

**Material Construction:**

Aluminum (RL96A-V75100T4)

The R96-V75100T4 is an ultra compact mini tombstone designed to work with smaller 4 and 5 Axis machines. The goal was to create a 4 sided tombstone to increase productivity while maintaining a compact footprint. The tombstone is built for the V75100X self-centering vise (see page 45). The nested bolt pattern allows for the vises to be mounted vertically or rotated horizontally. The entire tombstone will quick change onto any 96mm RockLock base plates. With a maximum of 12 vises on the tombstone, the machine can run unattended. This minimizes tool changes and frees operators up to run multiple machines. Includes 4x PS20F. Repeatability of +/- 8 µm.

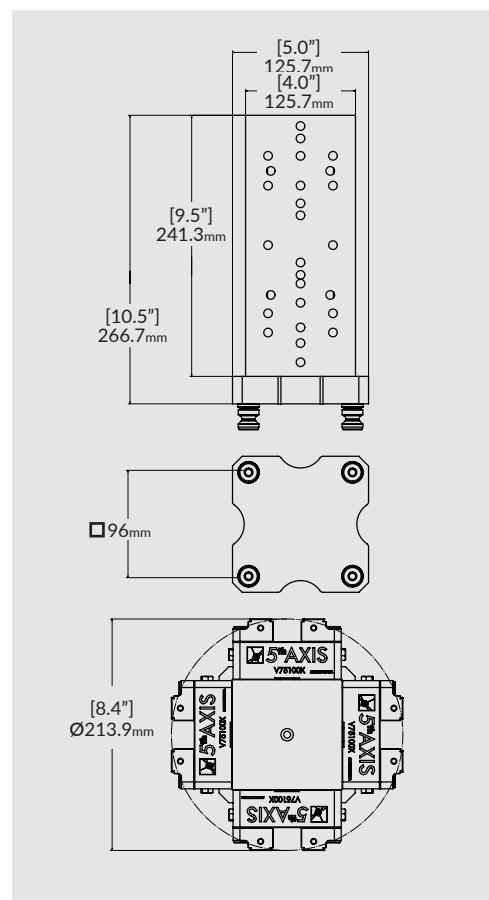

## R96-V75XT4



\*Vises sold separately


**Size:** 125.7mm x 125.7mm x 200mm

**Mounting:** RockLock PS20F

**Material Construction:**

Aluminum (RL96A-V75XT4)

The R96-V75XT4 is a mini tombstone is designed to work with smaller 4 and 5 Axis machines. The goal was to create a 4 sided tombstone to increase productivity while maintaining a compact footprint. This tombstone can accommodate the following self-centering vises: V75100X and V75150X (see page 45). It will also fit the DV75150X double station vise (see page 39). The entire tombstone will quick change on any 96mm RockLock base plates. With a maximum of 8 vises on the tombstone, the machine can run unattended. This minimizes tool changes and frees operators up to run multiple machines. Includes 4x PS20F. Repeatability of +/- 8 µm.

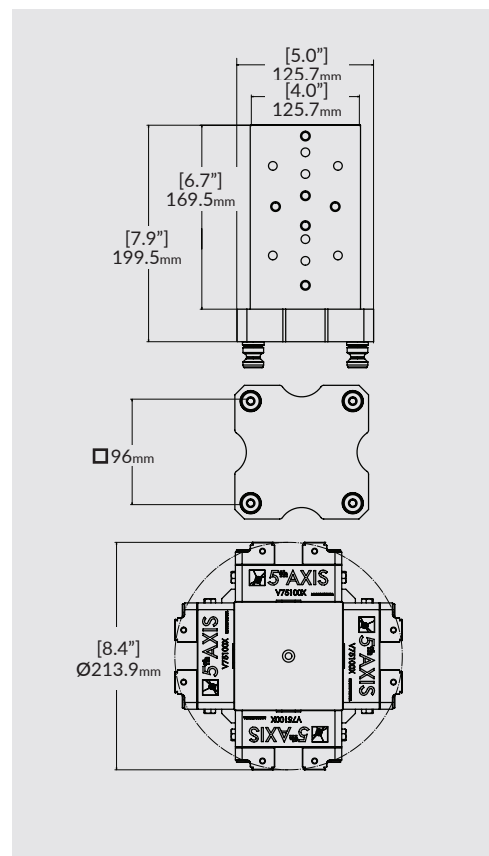




## R96-D115T41



**Size:** 125mm x 125mm x 106.7mm  
**Spacing:** RockLock PS20F

Built for small or medium rotaries. Able to utilize 4x D115 in order to maximize part density. This tombstone utilizes D115 dovetail fixtures allowing minimal interference. 4x PS20F Pull studs are included.

Repeatability of +/- 8 µm.

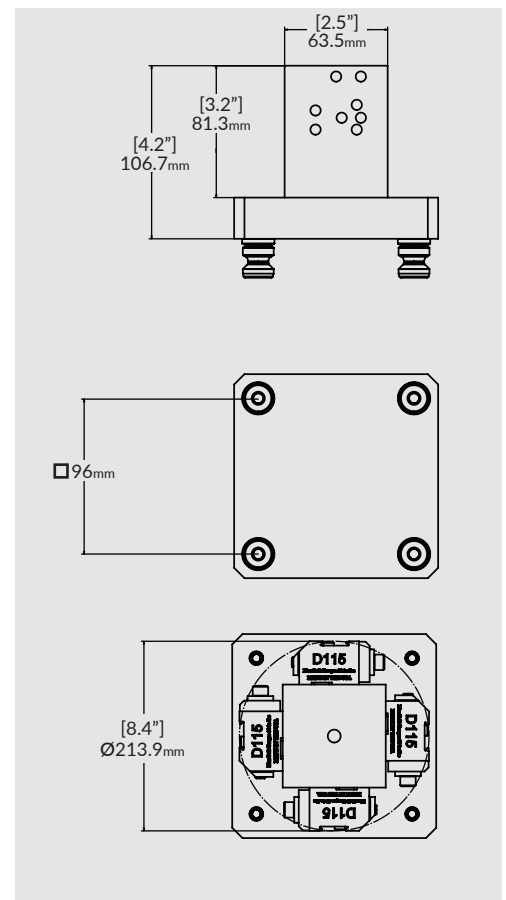

\*Fixtures sold separately

## 3 Sided Vise Pyramids with 3x RL96A-56




### PY30RL96-56

30° angle. For use machines with 120° or more tilt.

### PY20RL96-56

20° angle. For use with 110° or more tilt.

Pyramids are compatible with 96mm RockLock top tooling. Top tooling can be mounted in vertical or horizontal orientation. Machine make and model required when ordering to ensure correct fitment. 3x RL96A-56 are included.

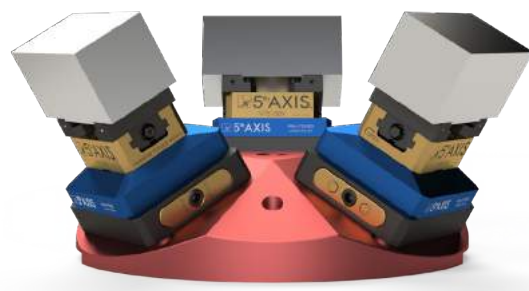



## PS20F

### PULL STUD

**Size:** 96mm Pull Studs

**Material Construction:** S7 Tool Steel

The PS20F is required to use any 5th Axis 96mm base. The 96mm spacing allows for compatibility with other systems.

\*Please note that pull studs must stay with the corresponding company's base plate. If you are using a 5th Axis 96mm RockLock base plate you will need 5th Axis pull studs (PS20F). The spacing and thread allows for the top tooling to be interchangeable between the different systems.



## PS20F-PY

### SINGLE PULL STUD WITH POKA-YOKE INSERT

**Size:** 96mm Pull Studs

**Material Construction:** S7 Tool Steel

Poka-yoke is a Japanese term that means "mistake-proofing". The PS20F-PY is a single modified pull stud with aluminum ring. The ring is placed inside one of the locating holes in the RockLock base, allowing for only the single poka-yoke pull stud to fit inside the locating hole with the corresponding ring. This will prevent operators from changing the orientation and misloading a part.



## PS20F-4PY

### PULL STUDS WITH POKA-YOKE INSERT

**Size:** 96mm Pull Studs

**Material Construction:** S7 Tool Steel

3x Standard PS20F Pull Studs and one Poka-Yoke (PS20F-PY).




## R96-BLANK

**Size:** 96mm Pull Studs

**Material Construction:** 6061 Aluminum

Blank 6061 aluminum block with 4x PS20F pull studs included. Quickly build your own fixture or subplate with the R96-Blank.

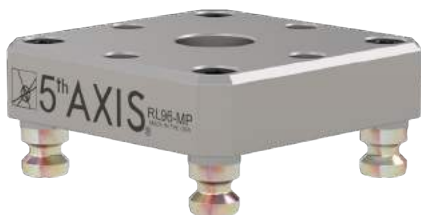

## RL96-MP

**Size:** 96mm Pull Studs

**Material Construction:** Steel

Mount the RockLock base onto the machine, drop in the master pallet, dial in your setup, and torque your mounting bolts once you have reached the desired location. This is the fastest, most accurate way to set up the RockLock system. See page 33 for more info.

## RL96-KD688 / RL96-KDX6\*


**Size:** RL96-KD688: 13" x 8.25" x .78"

RL96-KDX6: 13" x 6.92" x .78"

**Material Construction:**

Aluminum (RL96-KD688)

Aluminum (RL96-KDX6)

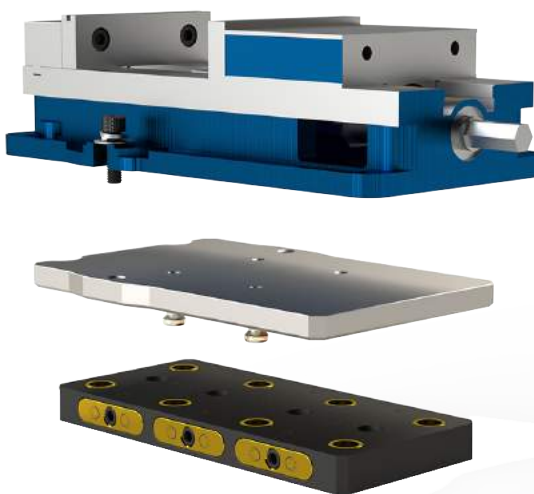

The RL96-KD688 is built to upgrade your Kurt D-series 6" vise to the RockLock quick change system. Never indicate your Kurt vise in again! Simply bolt your Kurt vise onto the adapter and you will be off and running. Part number includes adapter + 4x PS20F pull studs.

The RL96-KDX6 is built for the newer style DX6 crossover vise. Upgrade your new Kurt DX6 to RockLock quick change system from 5th Axis. Part number includes adapter + 4x PS20F pull studs.



\*Vise and RockLock base sold separately



## AUTOMATION

5th Axis Workholding products are designed to adapt to automated systems increasing throughput. Create profitability through efficiency.

Automation

**EROWA**  
system solutions  
**SOLUTIONS**



148mm



320mm



400mm

**EROWA**  
system solutions  
**INTEGRATED**



Integrated EROWA 52mm  
RockLock Available for  
148mm EROWA pallets

**system 3R**  
**SOLUTIONS**



156mm

280mm




400mm

**INTEGRATED  
SOLUTIONS FOR  
MAATSURA**

**RL96A-6695  
RL96S-6695**

Fits MAM72-25V/CUBLEX-25/CUBLEX-35/MAM7235V/MX-330

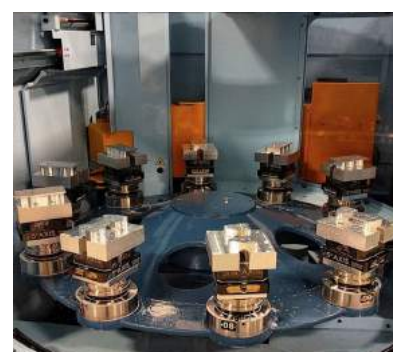



## Automation Base




Available in 52mm and 96mm Pull Stud Spacing



Clamp / Unclamp Confirmation



Steel Locating Features

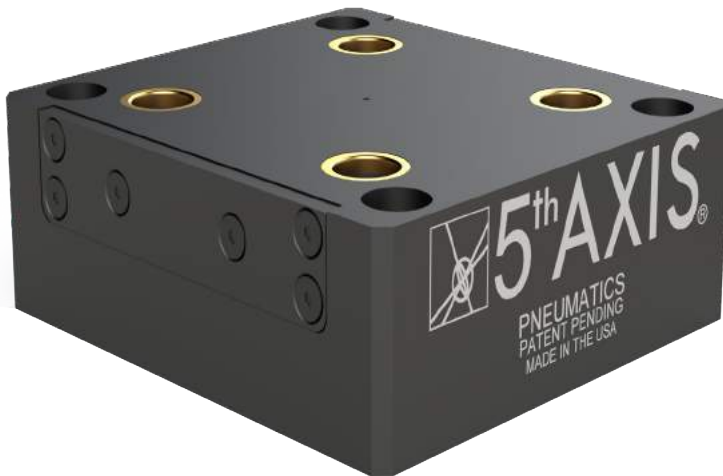

96mm



52mm

Automation

**FAIL SAFE**

Air to open  
Spring to Close

**AUTOMATION  
OR MANUAL**

Use with robot  
or manually

**MULTIPLE  
AIRPORTS**

Airports located  
on the bottom and  
side of unit



\*Please contact us regarding the details of your automation project and we can help recommend the correct product for your application\*

## Master Alignment Pallet

Master Pallet



**Available in 96mm and 52mm**



**Ensures RockLock repeatability less than 8  $\mu$ m**



**Precision milled and press fit pull studs\***



**One Master Pallet for all your RockLock systems**

Guarantees accuracy of the RockLock system. The Master Pallets are used to set up 52mm and 96mm RockLock systems.

Mount the RockLock base onto the machine, drop in the Master Pallet, dial in your setup, and torque your mounting bolts once you have reached the desired location.


Master Pallet will only be used on the initial setup or if you move the setup from one machine to another. This is the fastest, most accurate way to set up the RockLock system.

\*Do not remove pull studs.


\*\*Instructional video provided on our website.

\*\*\*CMM report provided with purchase of Master Pallet.



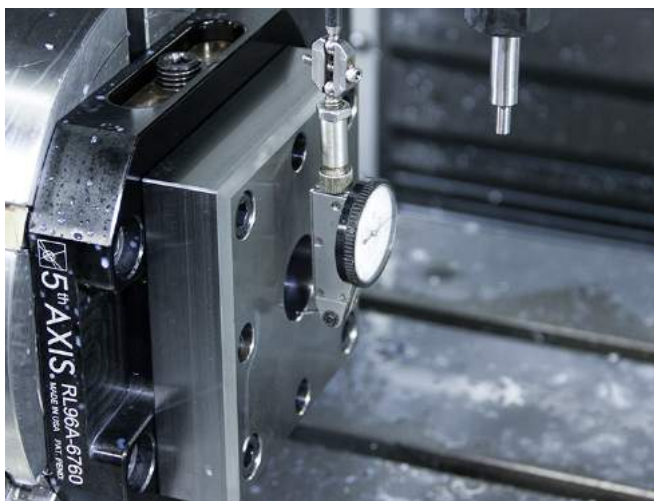


Precision center bore allows for indication of rotation.

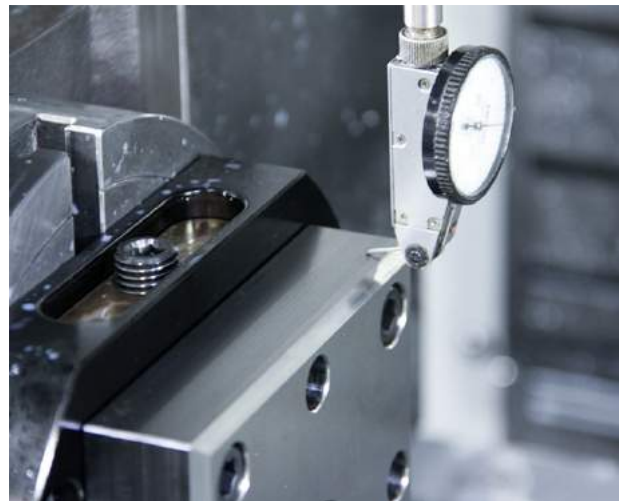

Precision milled sides allow for indication of center line.

## Master Pallets

| Part Number | RL52-MP                                                                             | RL96-MP                                                                              |
|-------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|             |  |  |
| Size        | 75mm x 75mm x 25.4mm                                                                | 125.73mm x 125.73mm x 30.48mm                                                        |
| Mounting    | RockLock PS16F Pull Studs Included                                                  | RockLock PS20F Pull Studs Included                                                   |
| Materials   | Steel                                                                               | Steel                                                                                |

## Double Station Vises

# BUILT FOR 3-AXIS



Convert from double station to single position fixed jaw\*

Quickly change jaws / convert to soft jaws

Compact footprint maximizes table space

\*Not a self-centering vise\*


Double Station



Double Station



Single Station  
Fixed Jaw

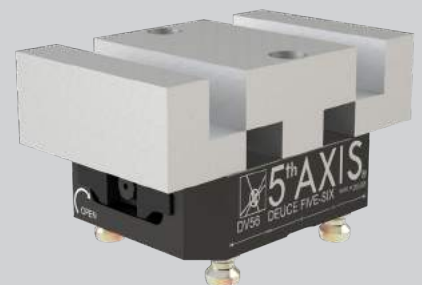

Machinable Jaws

\*Only applies to DV56 and DV510

## Quickly Convert From Double To Single Fixed Station\*



### Double Station

This configuration utilizes the center portion as the fixed position.



### Independent Movement

Each jaw moves independently. This allows for stock of different sizes and ensures proper clamping.



### Reversible Jaw

Jaws can quickly and easily be reversed for increased clamping range.



### Removing Center Jaw

The center jaw is bolted through the base and held in position with precision bushings.



### Shoulder Bolts Lock Back Jaw

The vise base has two precision bores that allow for shoulder bolts to lock the back jaw when switching to a single station.




### Fixed Jaw\*

In this configuration the vise operates like any traditional machine vise.

\*DV56 and DV510 only

## Maximize Your Table Space

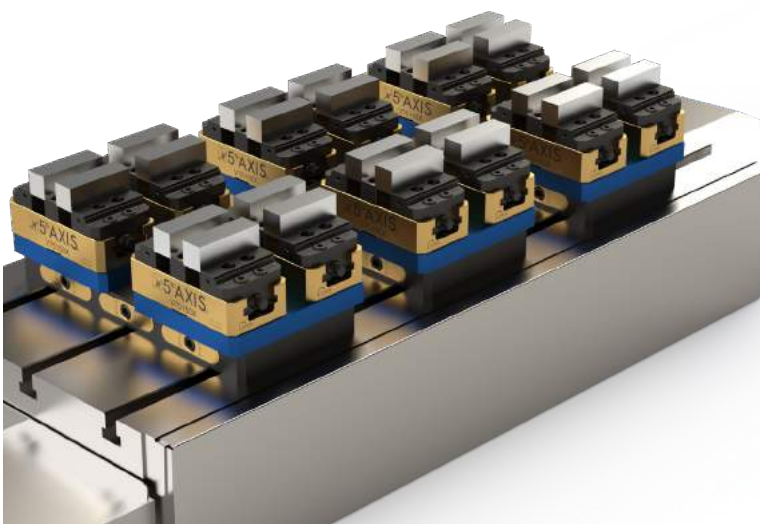

\*Only applies to DV56 and DV510

# Double Station Vises

## Master Hard Jaws

| Part Number                           | DV75150X-J1                                                                       | DV56-J1                                                                           | DV510-J1                                                                           | DV510-J4                                                                            |
|---------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                       |  |  |  |  |
| Size                                  | 75mm x 150mm x 56mm                                                               | 125.7mm x 152.4mm x 72.9mm                                                        | 125.7mm x 258.3mm x 73.4mm                                                         | 125.7mm x 258.3mm x 73.4mm                                                          |
| Jaw Type                              | Hardened Steel 3 Piece Master Jaw Set Serrated / 45° Dovetail                     | Hardened Steel 3 Piece Master Jaw Set Serrated / 45° Dovetail                     | Hardened Steel 3 Piece Master Jaw Set with 2" Center Serrated / 45° Dovetail       | Hardened Steel 3 Piece Master Jaw Set with 1" Center Serrated / 45° Dovetail        |
| Jaw Width                             | 75mm                                                                              | 125.7mm                                                                           | 125.7mm                                                                            | 125.7mm                                                                             |
| Clamping Force                        | 13.5 kN @ 60 Nm                                                                   | 20.0 kN @ 75 Nm                                                                   | 20.0 kN @ 75 Nm                                                                    | 20.0 kN @ 75 Nm                                                                     |
| Max Torque                            | 60 Nm                                                                             | 75 Nm                                                                             | 75 Nm                                                                              | 75 Nm                                                                               |
| Forward Clamping Range                | 0 - 37.02mm                                                                       | 0 - 28.5mm                                                                        | 0 - 66.7mm                                                                         | 0 - 79.4mm                                                                          |
| Reverse Clamping Range                | 17.26mm - 55.02mm                                                                 | 31.0mm - 64.2mm                                                                   | 30.9mm - 102.3mm                                                                   | 30.9mm - 115mm                                                                      |
| Single Station Forward Clamping Range | N/A                                                                               | 0 - 75.9mm                                                                        | 0 - 177.5mm                                                                        | 0 - 177.5mm                                                                         |
| Single Station Reverse Clamping Range | N/A                                                                               | 56.8mm - 147.3mm                                                                  | 56.8mm - 248.7mm                                                                   | 56.8mm - 248.7mm                                                                    |

Double Station



DV75150X-J1 shown on the RL96A-3613S1 base

## Aluminum Jaws

| Part Number    | DV75150X-J2                                                                       | DV56-J2                                                                           | DV510-J2                                                                            |
|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                |  |  |  |
| Size           | 75mm x 150mm x 64.1mm                                                             | 125.7mm x 152.4mm x 89mm                                                          | 125.7mm x 258.3mm x 88.5mm                                                          |
| Jaw Type       | 6061 Aluminum Machinable Jaw Set                                                  | 6061 Aluminum Machinable Jaw Set                                                  | 6061 Aluminum Machinable Jaw Set                                                    |
| Jaw Width      | 75mm                                                                              | 125.7mm                                                                           | 125.7mm                                                                             |
| Clamping Force | 13.5 kN @ 60 Nm                                                                   | 20.0 kN @ 75 Nm                                                                   | 20.0 kN @ 75 Nm                                                                     |
| Max Torque     | 60 Nm                                                                             | 75 Nm                                                                             | 75 Nm                                                                               |

## Steel Jaws

| Part Number    | DV75150X-J3                                                                         | DV56-J3                                                                             | DV510-J3                                                                              |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                |  |  |  |
| Size           | 75mm x 150mm x 64.1mm                                                               | 125.7mm x 152.4mm x 89mm                                                            | 125.7mm x 258.3mm x 88.5mm                                                            |
| Jaw Type       | 1018 Steel Machinable Jaw Set                                                       | 1018 Steel Machinable Jaw Set                                                       | 1018 Steel Machinable Jaw Set                                                         |
| Jaw Width      | 75mm                                                                                | 125.7mm                                                                             | 125.7mm                                                                               |
| Clamping Force | 13.5 kN @ 60 Nm                                                                     | 20.0 kN @ 75 Nm                                                                     | 20.0 kN @ 75 Nm                                                                       |
| Max Torque     | 60 Nm                                                                               | 75 Nm                                                                               | 75 Nm                                                                                 |



# Double Station Vises


## DV75150X-J1 Master Hard Jaws



**Size:** 75mm x 150mm x 56.1mm  
**Jaw Set Material:**  
 Hardened Steel 3 Piece Master Jaw Set  
 with Serrated / 45° Dovetail  
**Jaw Width:** 75mm  
**Clamping Force:** 13.5 kN @ 60 Nm  
**Max Torque:** 60 Nm  
**Forward Clamping Range:**  
 0-37.02mm  
**Reverse Clamping Range:** 17.23 - 55.02mm

Double station vise with serrated and dovetail master jaws. Perfect for making parts that are less than 55mm x 75mm.

\*Cannot be used in single station configuration\*

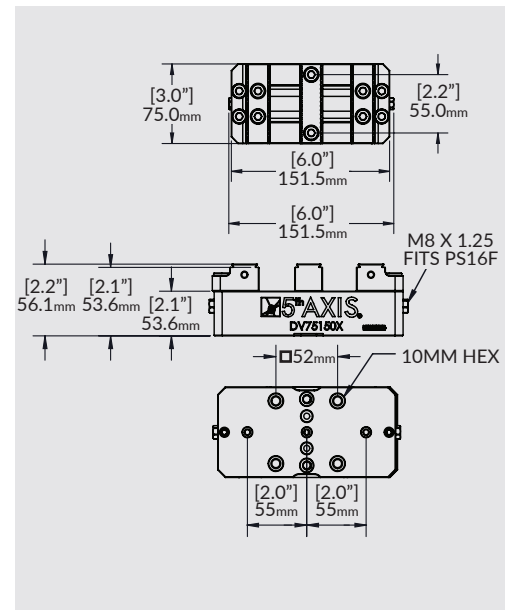


## DV75150X-J2 Aluminum Jaws



**Size:** 75mm x 150mm x 56.1mm  
**Jaw Set Material:**  
 6061 Aluminum Machinable Jaw Set  
**Jaw Width:** 75mm  
**Clamping Force:** 13.5 kN @ 60 Nm  
**Max Torque:** 60 Nm

Double station vise with 6061 aluminum machinable jaws. Perfect for secondary operation work.

\*Cannot be used in single station configuration\*

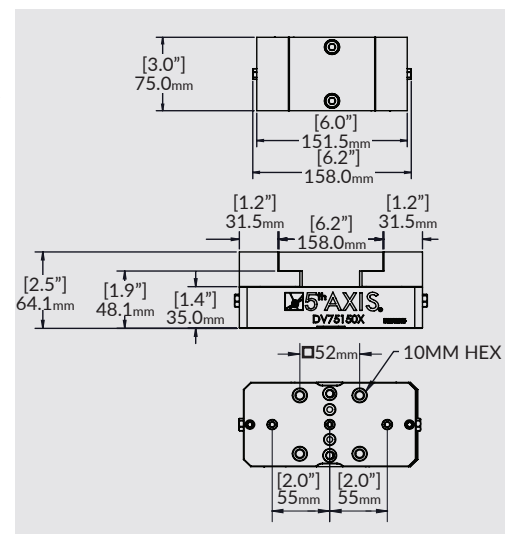


## DV75150X-J3 Steel Jaws



**Size:** 75mm x 150mm x 56.1mm  
**Jaw Set Material:**  
 1018 Steel Machinable Jaw Set  
**Jaw Width:** 75mm  
**Clamping Force:** 13.5 kN @ 60 Nm  
**Max Torque:** 60 Nm

Double station vise with 1018 steel machinable jaws. Perfect for secondary operation work.

\*Cannot be used in single station configuration\*

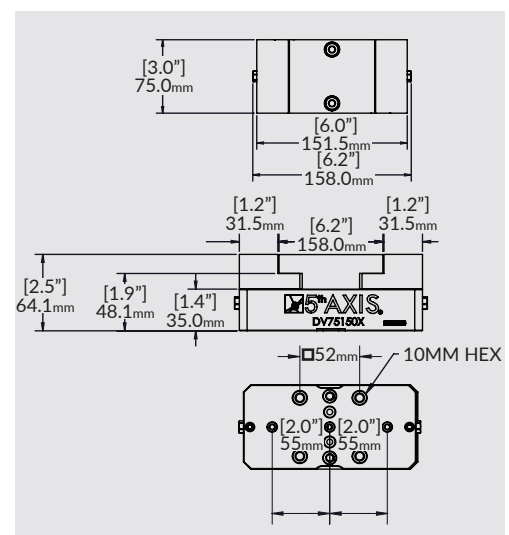



## DV56-J1 Master Hard Jaws



**Size:** 125.7mm x 152.4mm x 72.9mm

**Jaw Set Material:**

Hardened Steel 3 Piece Master Jaw Set with Serrated / 45° Dovetail

**Jaw Width:** 75mm

**Max Torque:** 75 Nm

**Forward Clamping Range:** 0 - 28.5mm

**Reverse Clamping Range:**

31mm - 64.2mm


**Fixed Jaw Forward Clamping Range:**

0 - 75.9mm

**Fixed Jaw Reverse Clamping Range:**

56.8 - 147.3mm

Quickly convert the DV56-J1 from a double station to a fixed single jaw vise. Perfect for parts smaller than 64.2mm x 125.7mm.

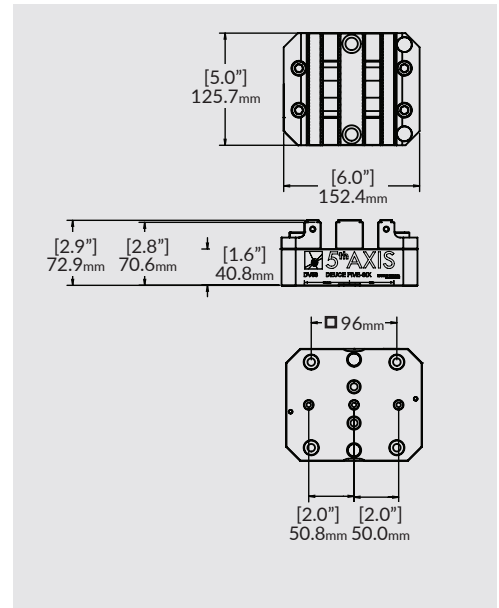

## DV56-J2 Aluminum Jaws



**Size:** 125.7mm x 152.4mm x 89mm


**Jaw Set Material:**

6061 Aluminum Machinable Jaw Set

**Jaw Width:** 75mm

**Max Torque:** 75 Nm

Double station vise with 6061 aluminum machinable jaws. Perfect for secondary operation work.

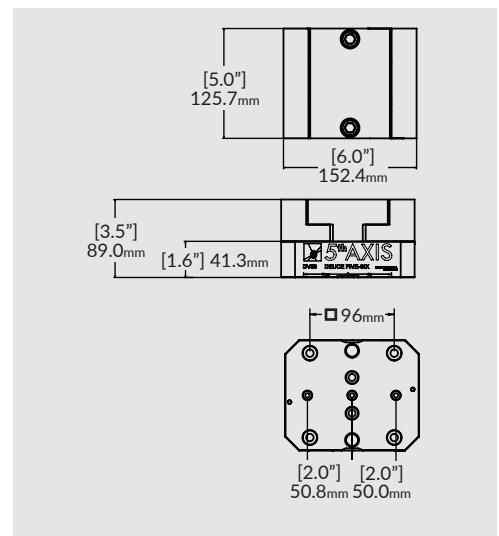

## DV56-J3 Steel Jaws



**Size:** 125.7mm x 152.4mm x 89mm


**Jaw Set Material:**

1018 Steel Machinable Jaw Set

**Jaw Width:** 75mm

**Max Torque:** 75 Nm

Double station vise with 1018 steel machinable jaws. Perfect for secondary operation work.

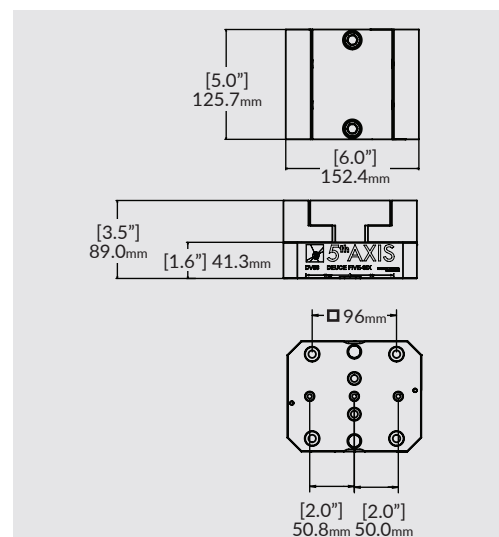

# Double Station Vises

## DV510-J1 Master Hard Jaws



**Size:** 125.7mm x 258.3mm x 73.4mm

**Jaw Set Material:**

Hardened Steel 3 Piece Master Jaw Set with 2" Center and Serrated / 45° Dovetail Jaws

**Jaw Width:** 125.7mm

**Max Torque:** 75 Nm

**Forward Clamping Range:**

0 - 66.7mm

**Reverse Clamping Range:**

30.9mm - 102.3mm


**Fixed Jaw Forward Clamping Range:**

0 - 177.5mm

**Fixed Jaw Reverse Clamping Range:**

56.8mm - 248.7mm

Double station vise that converts to a fixed jaw vise. 3 piece hard jaw set with a 2" center, serrations, and 45° dovetail master jaw.

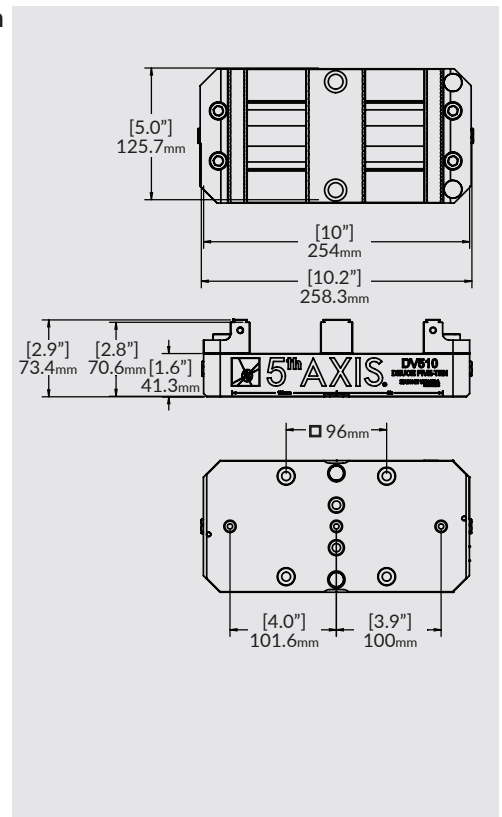

## DV510-J4 Master Hard Jaws



**Size:** 125.7mm x 258.3mm x 73.4mm

**Jaw Set Material:**

Hardened Steel 3 Piece Master Jaw Set with 1" Center and Serrated / 45° Dovetail Jaws

**Jaw Width:** 125.7mm

**Max Torque:** 75 Nm

**Forward Clamping Range:**

0 - 79.4mm

**Reverse Clamping Range:**

30.9mm - 115mm


**Fixed Jaw Forward Clamping Range:**

0 - 177.5mm

**Fixed Jaw Reverse Clamping Range:**

56.8mm - 248.7mm

Double station vise that converts to a fixed jaw vise. 3 piece hard jaw set with a 1" center, serrations, and 45° dovetail master jaw.

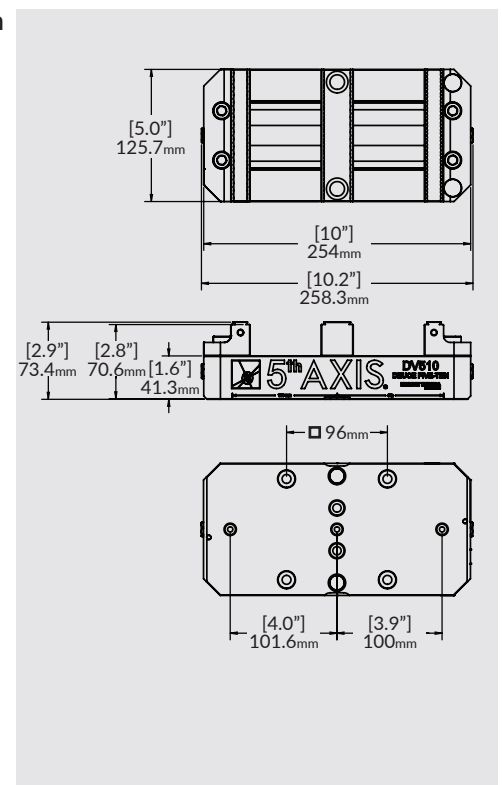


## DV510-J2 Aluminum Jaws



**Size:** 125.7mm x 258.3mm x 88.5mm  
**Jaw Set Material:**  
 6061 Aluminum Machinable Jaw Set  
**Jaw Width:** 125.7mm  
**Max Torque:** 75 Nm

Double station vise with 6061 aluminum machinable jaws. Perfect for secondary operation work

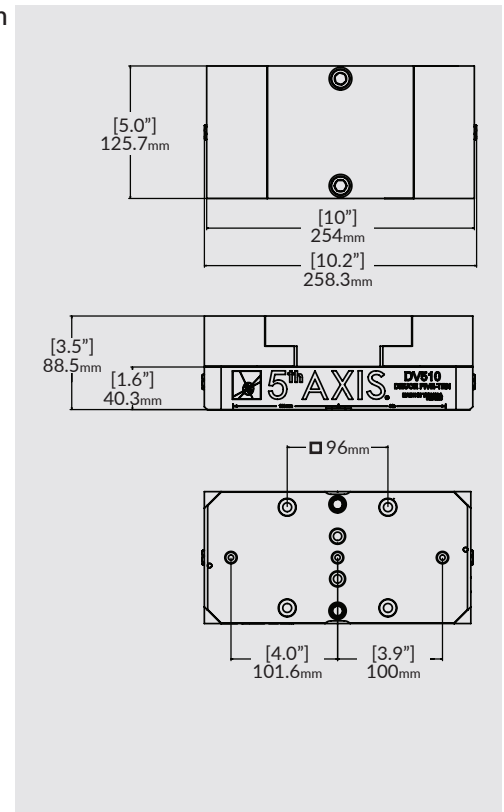


## DV510-J3 Steel Jaws



**Size:** 125.7mm x 258.3mm x 88.5mm  
**Jaw Set Material:**  
 1018 Steel Machinable Jaw Set  
**Jaw Width:** 125.7mm  
**Max Torque:** 75 Nm


Double station vise with 1018 steel machinable jaws. Perfect for secondary operation work

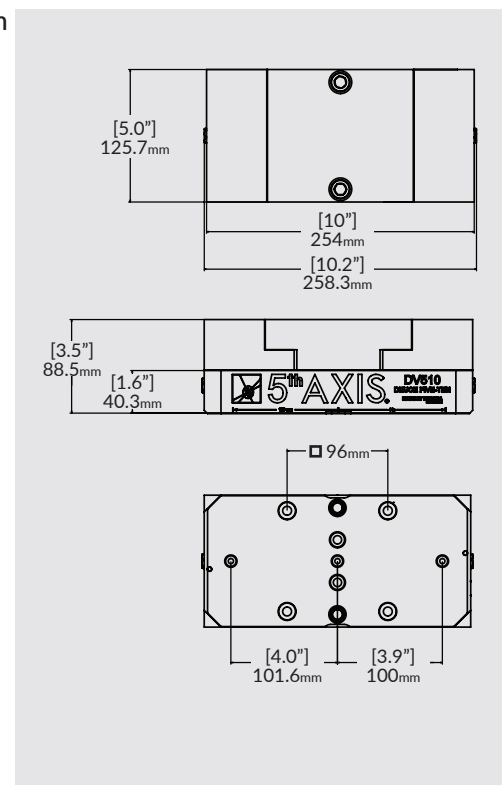


Double Station

# Self-Centering Vises

## Self-Centering Vises

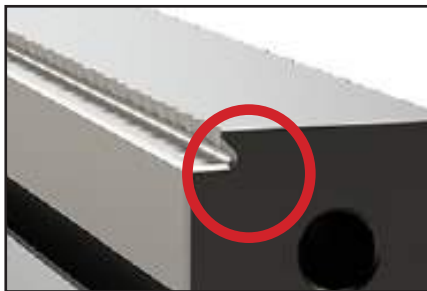

Built in 45° dovetail can be utilized for increased clamping force

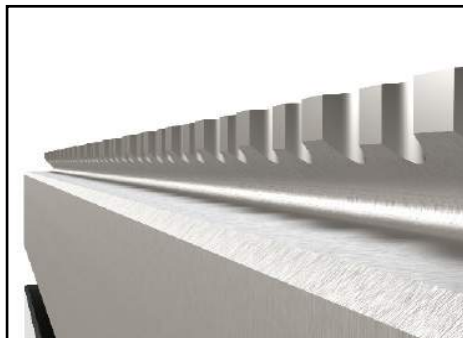

Serrated gripper teeth for superior bite into soft material



Quick change jaws without disassembling vise



Self-Centering

Pre-drilled for pull studs

Hardened steel

+/- 0.0005" on center

Large leadscrew

Jaws are easy to remove

Easy mounting to machine

# Self-Centering Vises

| Part Number            | V75100X                                                                           | V75150X                                                                           | V552M                                                                               |
|------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                        |  |  |  |
| Size                   | 75mm x 100mm x 56mm                                                               | 75mm x 150mm x 56mm                                                               | 125.7mm x 127mm x 73.6mm                                                            |
| Jaw Width              | 75mm                                                                              | 75mm                                                                              | 125.7mm                                                                             |
| Clamping Force         | 13.5 kN @ 60 Nm                                                                   | 13.5 kN @ 60 Nm                                                                   | 20.0 kN @ 75 Nm                                                                     |
| Max Torque             | 60 Nm                                                                             | 60 Nm                                                                             | 75 Nm                                                                               |
| Forward Clamping Range | 0 - 40.3mm                                                                        | 0 - 92.8mm                                                                        | 0 - 56.9mm                                                                          |
| Reverse Clamping Range | 38.5mm - 76.3mm                                                                   | 38.5mm - 128.8mm                                                                  | 77.8mm - 128.3mm                                                                    |

| Part Number            | V562M                                                                               | V510M                                                                               | V6105M                                                                                |
|------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                        |  |  |  |
| Size                   | 125.7mm x 152.4mm x 73.6mm                                                          | 125.7mm x 254mm x 73.6mm                                                            | 150mm x 254mm x 94.1mm                                                                |
| Jaw Width              | 125.7mm                                                                             | 126mm                                                                               | 150mm                                                                                 |
| Clamping Force         | 20.0 kN @ 75 Nm                                                                     | 20.0 kN @ 75 Nm                                                                     | 26.7 kN @ 100 Nm                                                                      |
| Max Torque             | 75 Nm                                                                               | 75 Nm                                                                               | 100 Nm                                                                                |
| Forward Clamping Range | 0 - 82.3mm                                                                          | 0 - 183.9mm                                                                         | 0 - 155.4mm                                                                           |
| Reverse Clamping Range | 77.7mm - 153.6mm                                                                    | 72.6mm - 254.8mm                                                                    | 93.6mm - 243.3mm                                                                      |

# Self-Centering Vises


## V75100X Metric



**Size:** 75mm x 100mm x 56mm  
**Jaw Width:** 75mm  
**Forward Jaws Clamping Range:**  
 0 - 40.3mm  
**Reverse Jaws Clamping Range:**  
 38.5mm - 76.3mm  
**Clamping Force:** 13.5 kN @ 60 Nm  
**Torque Vise Assembly:** 60 Nm

The V75100X is the most recent revision of our V75100 vise. Now equipped with 4 bolt jaw mounting to reduce jaw lift providing robust clamping and sharper teeth for a better bite.

This small compact 5 axis vise was created to be used on very small office type mills and micro pallet changers. We took the technology in the V552 and V562 and shrunk it down to create what is now the V75100X.

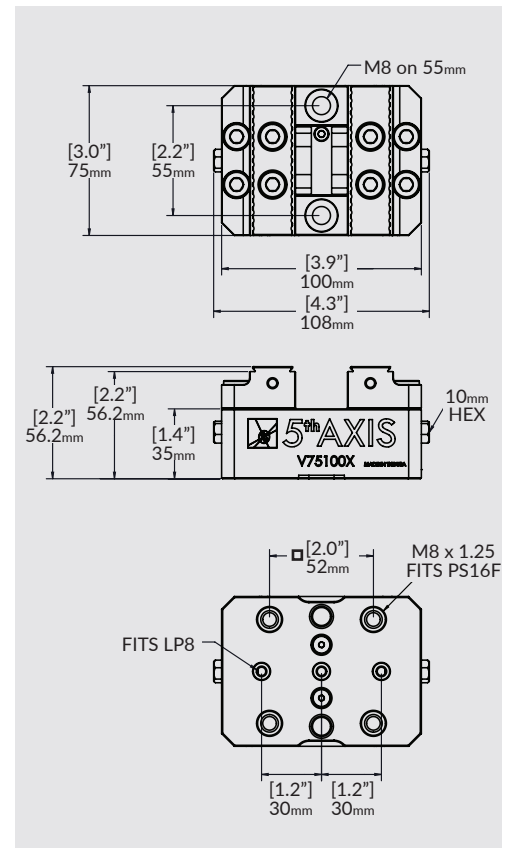


## V75150X Metric



**Size:** 75mm x 150mm x 56mm  
**Jaw Width:** 75mm  
**Forward Jaws Clamping Range:**  
 0 - 92.8mm  
**Reverse Jaws Clamping Range:**  
 38.5mm - 128.8mm  
**Clamping Force:** 13.5 kN @ 60 Nm  
**Torque Vise Assembly:** 60 Nm

The V75150X was created out of customer demand for a small self-centering vise with an increased clamping range over the popular V75100X vise. The base is 50mm longer than the standard V75100X, allowing the max workpiece size to increase from 76mm to 128mm. The V75150X maintains the same 75mm jaw width for maximum tool clearance. The new 4 bolt jaw mounting design reduces jaw lift and the sharper teeth provide a superior bite in raw material.

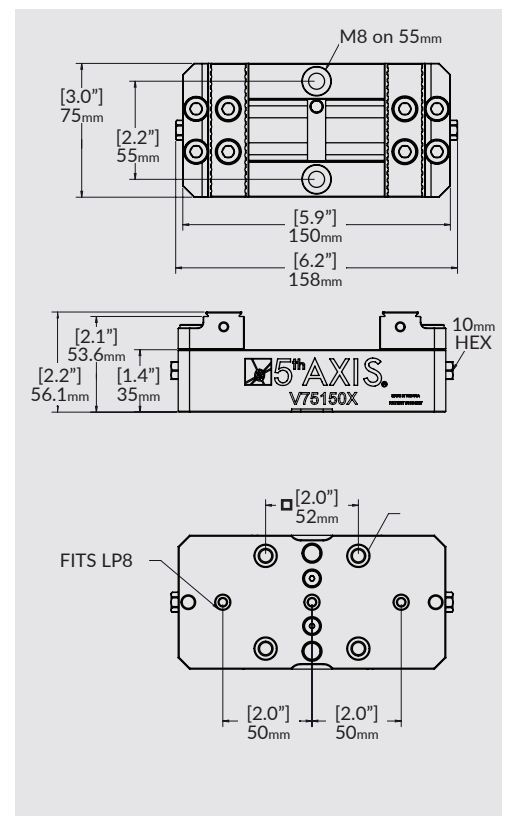




# Self-Centering Vises

## V552M Metric



**Size:** 125.7mm x 127mm x 73.6mm  
**Jaw Width:** 125.7mm  
**Forward Jaws Clamping Range:**  
 0 - 56.9mm  
**Reverse Jaws Clamping Range:**  
 77.8mm - 128.3mm  
**Clamping Force:** 20.0 kN @ 75 Nm  
**Torque Vise Assembly:** 75 Nm

The V552M is a 125mm x 125mm. It was created with the goal of fitting a self-centering vise on a small pallet for robotic loading cells. It has quickly become a favorite vise for shops utilizing smaller palletized systems as well as smaller rotary tables where clearance is a major concern.

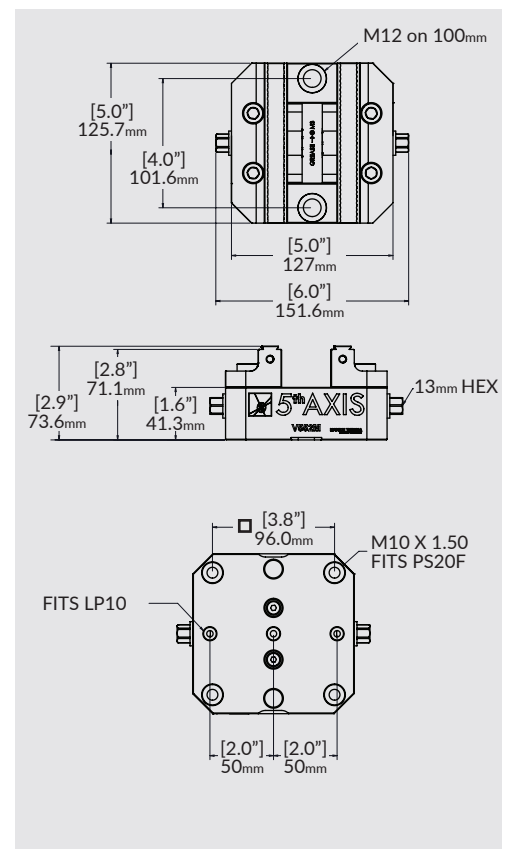


## V562M Metric



**Size:** 125.7mm x 152.4mm x 73.6mm  
**Jaw Width:** 125.7mm  
**Forward Jaws Clamping Range:**  
 0 - 82.3mm  
**Reverse Jaws Clamping Range:**  
 77.7mm - 153.6mm  
**Clamping Force:** 20.0 kN @ 75 Nm  
**Torque Vise Assembly:** 75 Nm

The V562M is the best selling self-centering vise in our product line. Its compact foot print and low profile design has made it the most popular choice for machine shops across the world. The V562M is built from heat treated 4100 series steel and is precision ground and hard milled to ensure accuracy and repeatability.

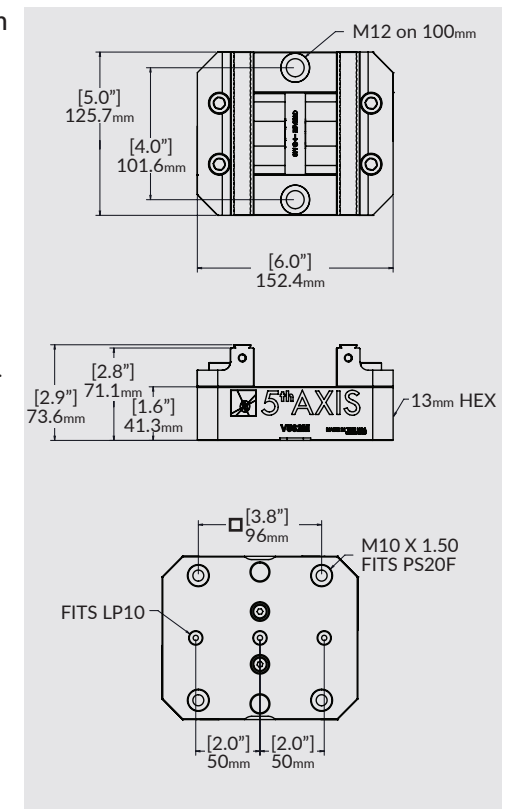

# Self-Centering Vises

## V510M Metric



**Size:** 125.7mm x 254mm x 73.6mm

**Jaw Width:** 126mm

**Forward Jaws Clamping Range:**

0 - 183.9mm


**Reverse Jaws Clamping Range:**

72.6mm - 254.8mm

**Clamping Force:** 20.0 kN @ 100 Nm

**Torque Vise Assembly:** 100 Nm

The V510M has all of the robust features of the V562M with the added an increased clamping range. With 254mm of clamping range, the V510M is a perfect fit for shops looking for a small footprint vise with a larger clamping range. The V510M is built from hardened and ground 4100 series steel to ensure accuracy and repeatability.

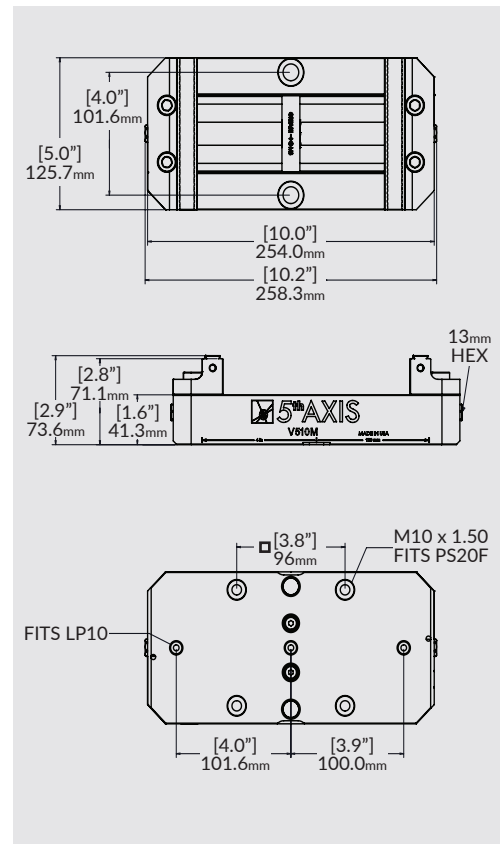

## V6105M Metric



**Size:** 150mm x 254mm x 94.1mm

**Jaw Width:** 150mm

**Forward Jaws Clamping Range:**

0 - 155.4mm

**Reverse Jaws Clamping Range:**


93.6mm - 243.3mm

**Clamping Force:** 26.7 kN @ 100 Nm





**Torque Vise Assembly:** 100 Nm

The V6105M is the largest 5 axis self centering vise in our product line. Its compact foot print and low profile design has made it a popular choice for machine shops across the world. The V6105M is built from heat treated 4100 series steel and is precision ground and hard milled to ensure accuracy and repeatability.

The “Master Jaws” on the V6105M self-centering vise are manufactured from hardened 4100 series steel. The jaws feature: 45 degree dovetail, 2.50mm step, and serrated gripper teeth for clamping aluminum and soft steel.

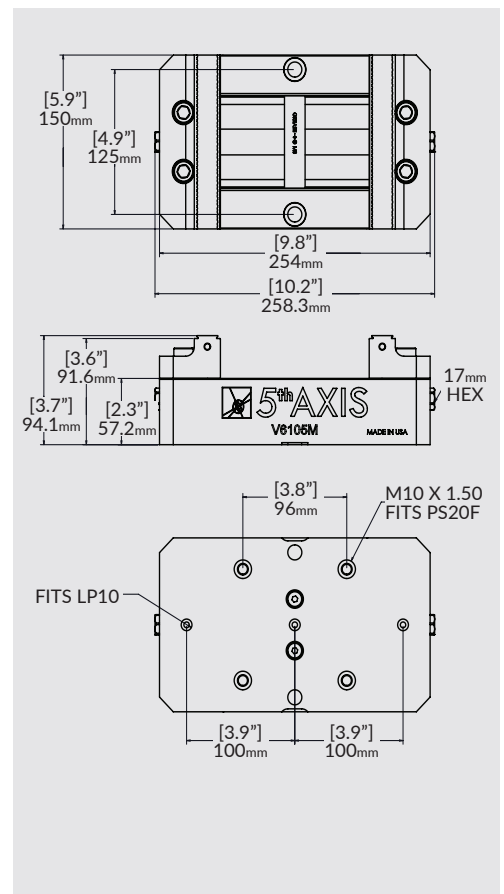


# Self-Centering Vises

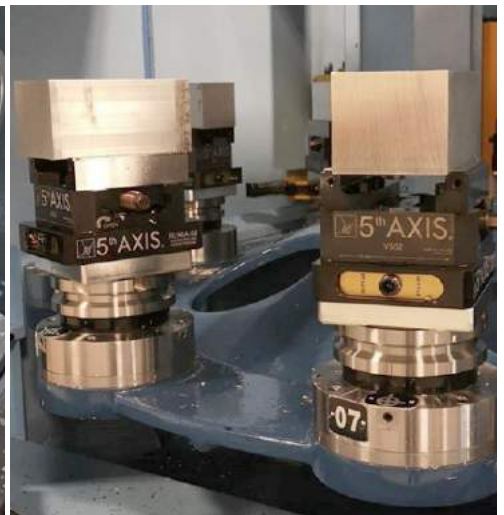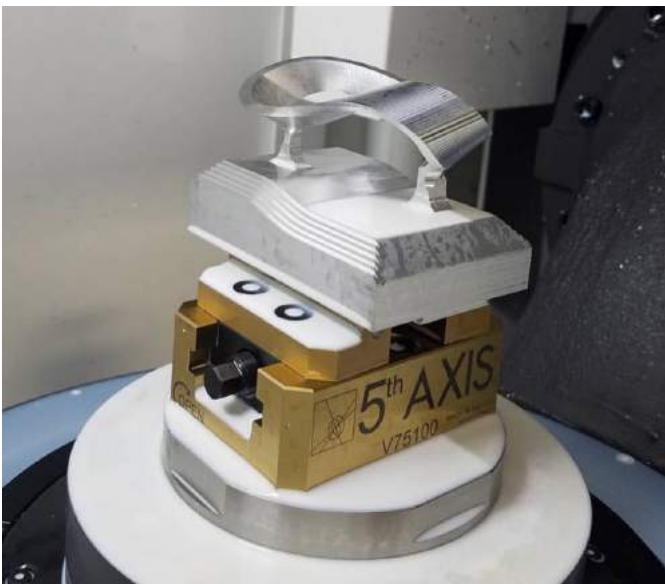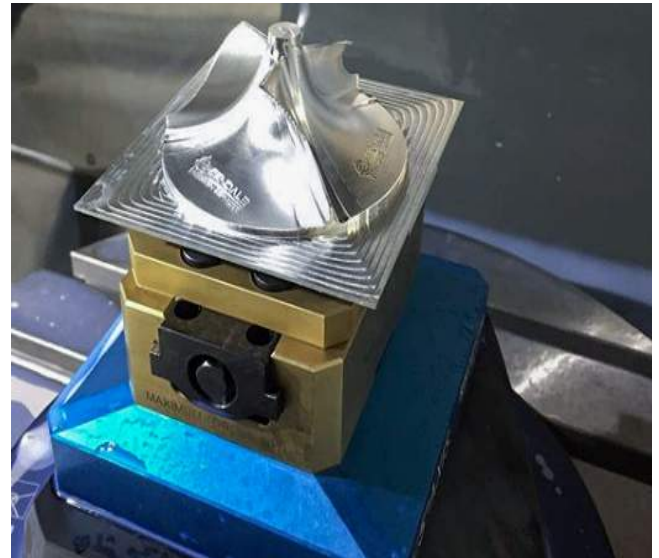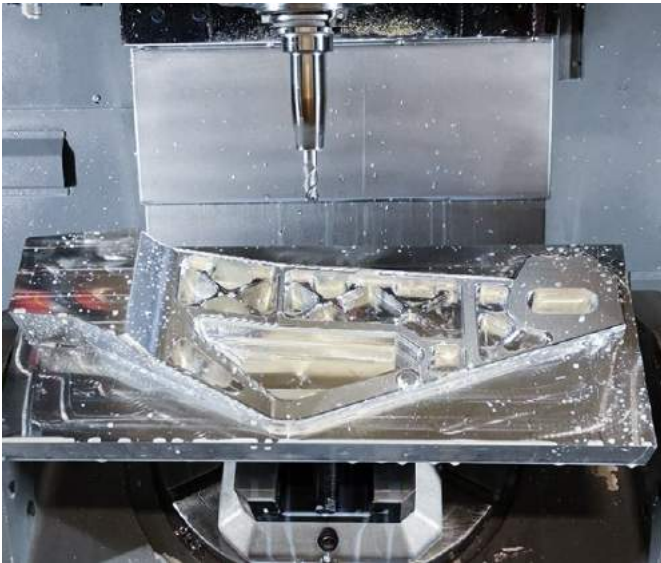

Self-Centering



Dovetail Fixtures

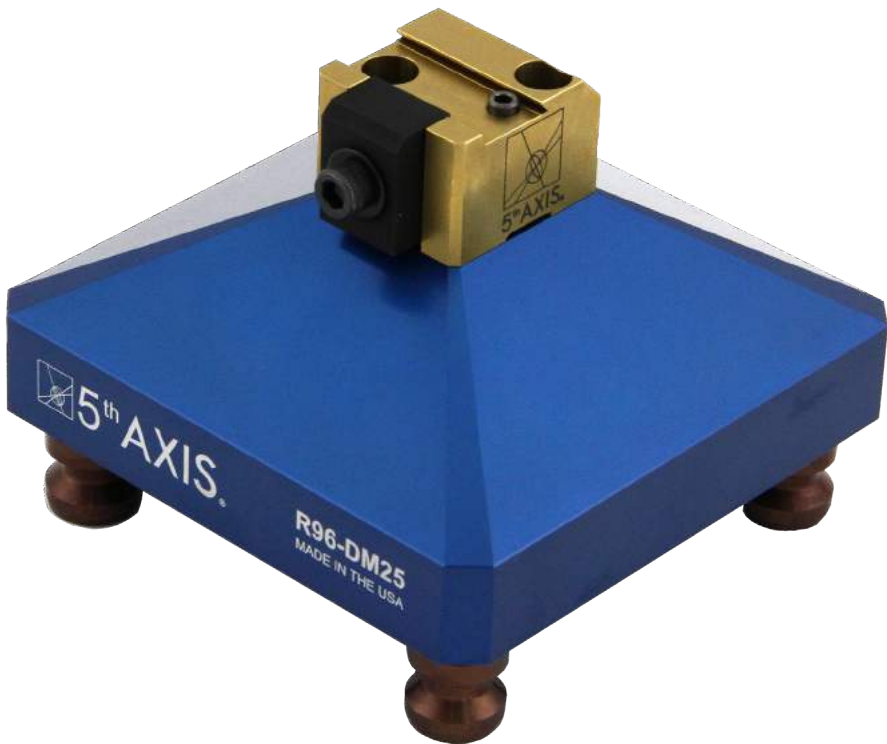

45° dovetail for increased clamping force



Locating pins for precise repeatability



Low profile design



Hardened steel clamp and body

Dovetail Fixtures


| Part Number    | DM12                                                                                | DM25                                                                                | DM50                                                                                 |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                |  |  |  |
| Size           | 21mm x 32mm x 19mm                                                                  | 37mm x 41mm x 27mm                                                                  | 50mm x 50mm x 38mm                                                                   |
| Stock Size     | 12mm - 25mm                                                                         | 25mm - 75mm                                                                         | 50mm and Above                                                                       |
| Dovetail Depth | 2.54mm                                                                              | 2.54mm                                                                              | 5.08mm                                                                               |

## DM12 Metric



**Size:** 21mm x 32mm x 19mm  
**Material:** 4100 Series Steel  
**Stock Size:** 12mm - 25mm  
**Dovetail Depth Required:** 2.54mm

The DM12 is the smallest dovetail fixture in the 5th Axis workholding line. The DM12 features a wedge style clamp for superior gripping force and a low profile design that optimizes tool clearance. This micro dovetail fixture is the perfect choice for multi-axis work on smaller parts.

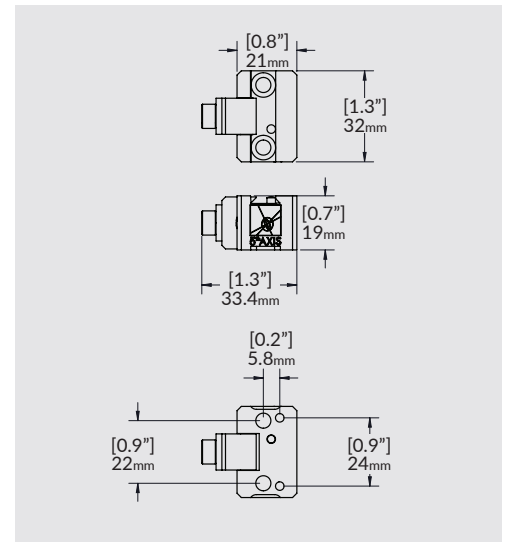


## DM25 Metric



**Size:** 37mm x 41mm x 27mm  
**Material:** 4100 Series Steel  
**Stock Size:** 25mm - 75mm  
**Dovetail Depth Required:** 2.54mm

The DM25 is the most versatile dovetail fixture in the 5th Axis workholding line. It is a simple and robust dovetail fixture built for stock under 75mm. The DM25 features a robust clamp for superior gripping force and a low profile design that optimizes tool clearance. This dovetail fixture is the perfect choice for multi-axis work on small to medium sized parts.

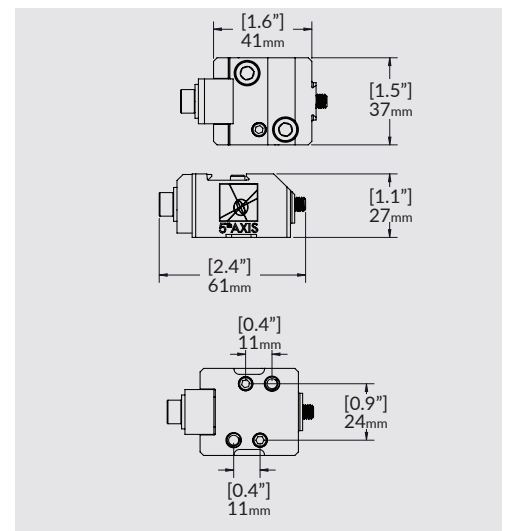


## DM50 Metric







**Size:** 50mm x 50mm x 38mm  
**Material:** 4100 Series Steel  
**Stock Size:** 50mm+  
**Dovetail Depth Required:** 5.08mm

The DM50 is a 50mm x 38mm dovetail fixture in the 5th Axis workholding line. The DM50 is a simple and robust dovetail fixture built for stock 50mm and above, features a wedge style clamp for superior gripping force, and a low profile design that optimizes tool clearance.


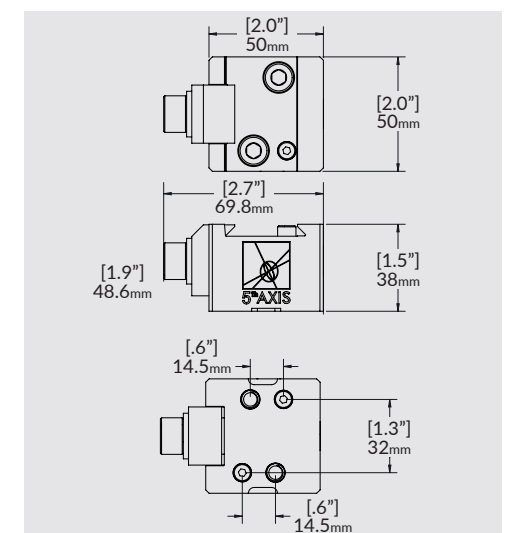


# Dovetail Fixtures

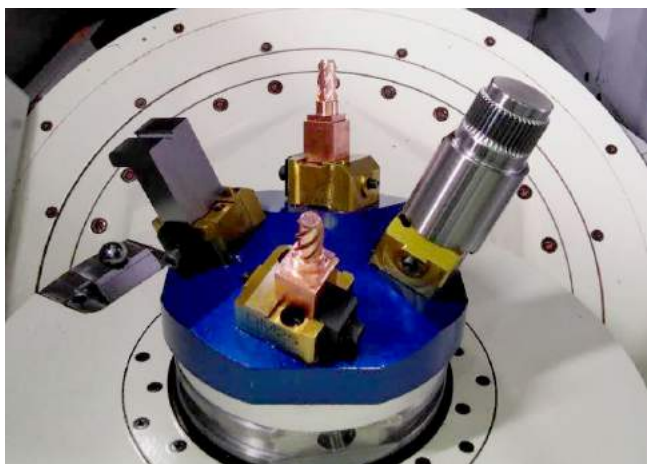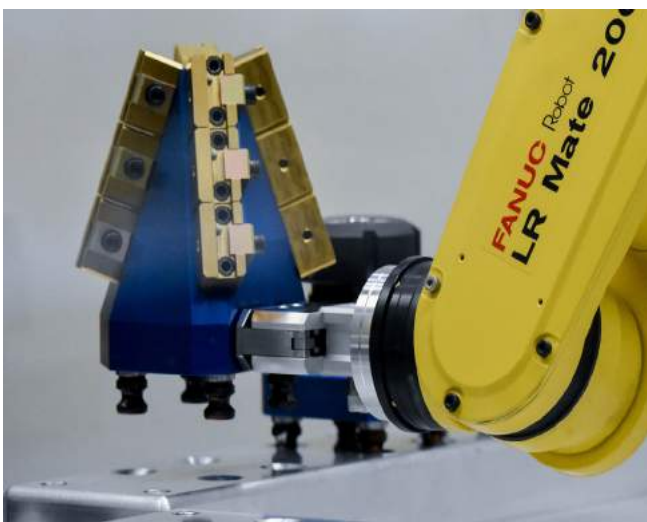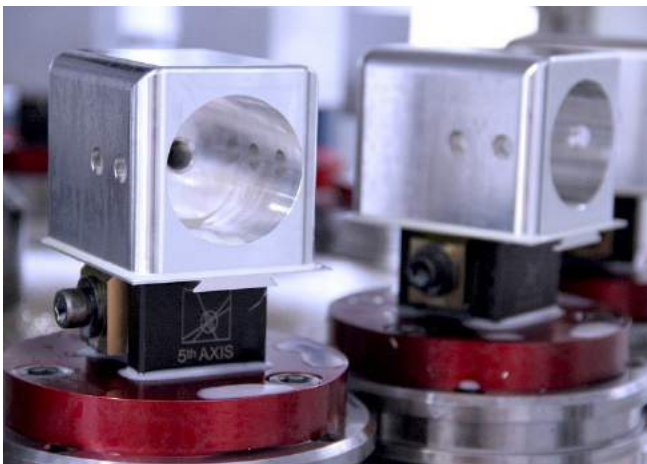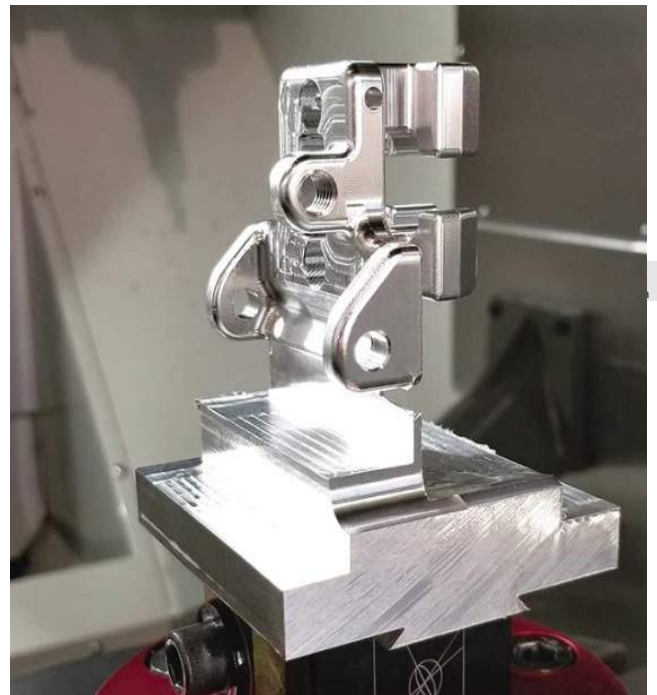




# Dovetail Fixtures Examples

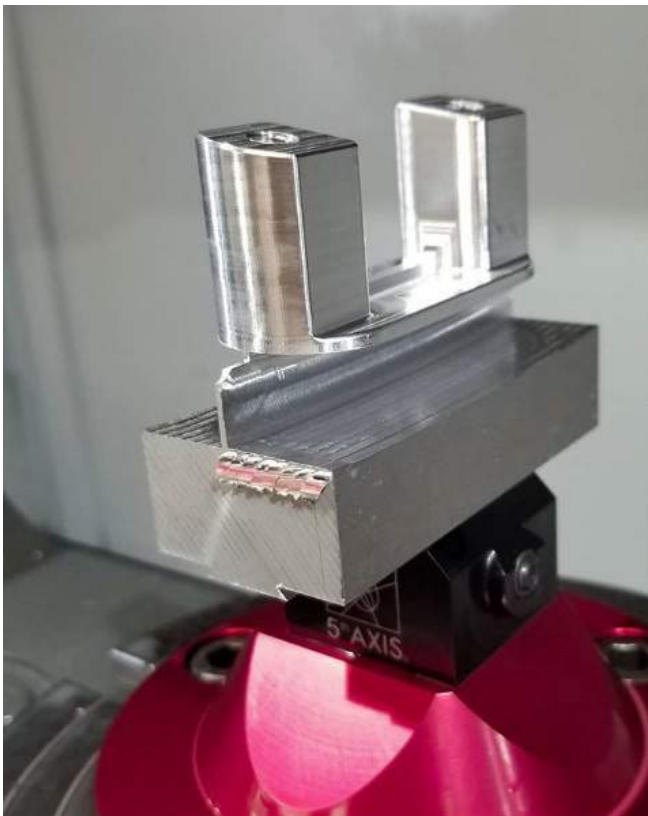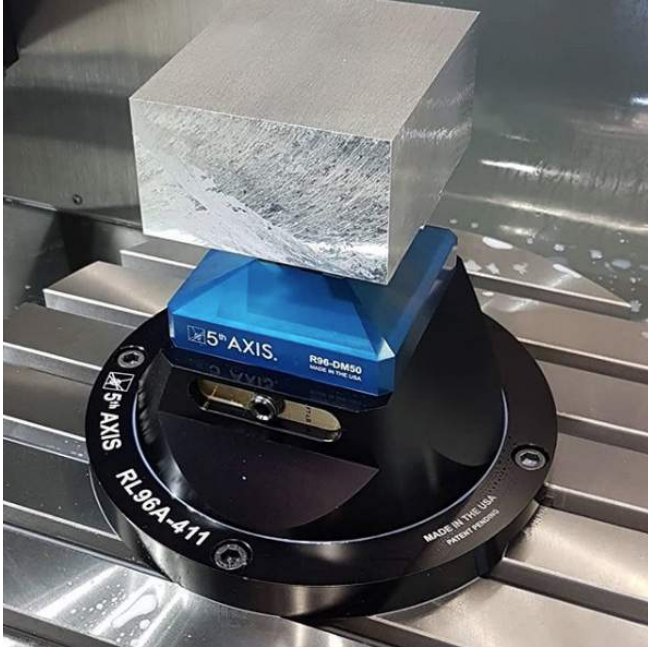

# Dovetail Fixtures

## R52-P12DM12




### Metric

**Spacing:** 125.73mm x 125.73mm x 133.5mm

**Material Construction:** 6061 Aluminum

Built for our 52mm RockLock Quick Change System, the R52-P12DM12 provides maximum amount of flexibility. This 4-sided pyramid utilizes twelve DM12 dovetail fixtures for stock under 25mm. The orientation of the fixtures on the pyramid ensures optimal tool clearance for multiple parts. Machine up to 12 parts on this compact unit. The modular design allows for fixtures to be added or removed depending on the length of the workpiece.

## R96-P12DM12



### Metric

**Spacing:** 125.73mm x 125.73mm x 133.5mm

**Material Construction:** 6061 Aluminum

Built for our 96mm RockLock Quick Change System, the R96-P12DM12 provides maximum amount of flexibility. This 4-sided pyramid utilizes twelve DM12 dovetail fixtures for stock under 25mm. The orientation of the fixtures on the pyramid ensures optimal tool clearance for multiple parts. Machine up to 12 parts on this compact unit. The modular design allows for fixtures to be added or removed depending on the length of the workpiece.

## R52-P4DM25



### Metric

**Spacing:** Ø152.4mm x 64.9mm

**Material Construction:** 6061 Aluminum

This compact pyramid utilizes four DM25 dovetail fixtures. The small foot print ensures no space is wasted allowing simultaneous machining of four parts. Run more parts per cycle and minimize pallet and tool changes. This versatile fixture can be mounted on trunnions, pallets, and machine tables using our 52mm RockLock Quick Change System.

## R96-P4DM25




### Metric

**Spacing:** Ø152.4mm x 64.9mm

**Material Construction:** 6061 Aluminum





This compact pyramid utilizes four DM25 dovetail fixtures. The small foot print ensures no space is wasted allowing simultaneous machining of four parts. Run more parts per cycle and minimize pallet and tool changes. This versatile fixture can be mounted on trunnions, pallets, and machine tables using our 96mm RockLock Quick Change System.

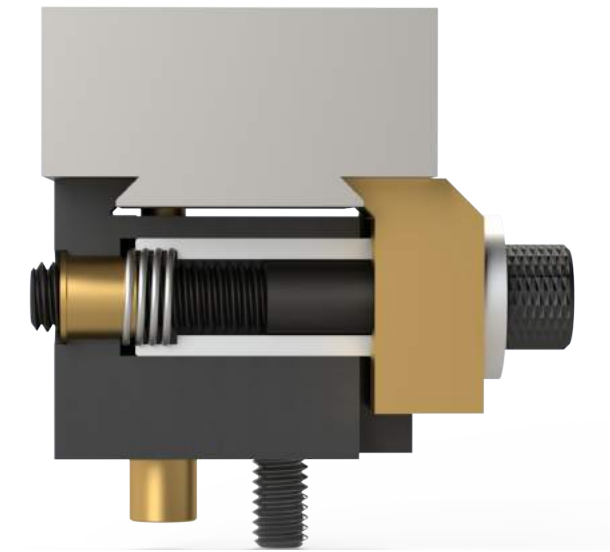



## Sample Dovetail Stock Prep (DM25)

1 PROGRAM TO THEORETICAL SHARP DOVETAIL (12.40) AND CUTTER DIAMETER (45.5 FOR DC1750-45)

### STOCK PREP

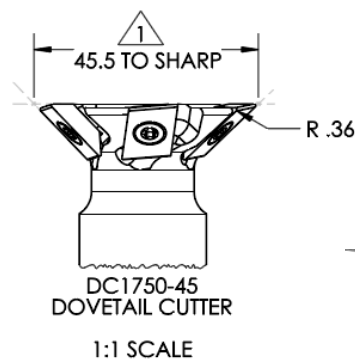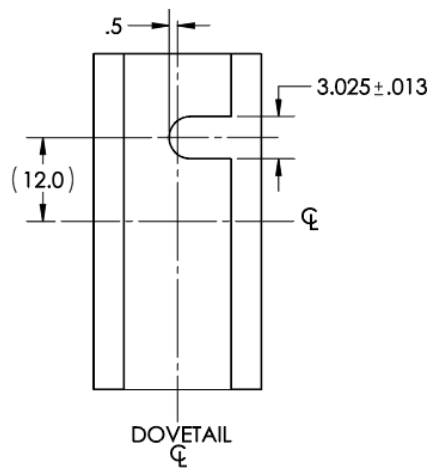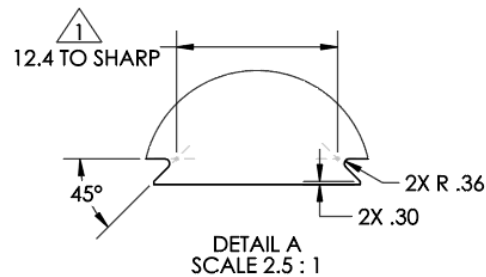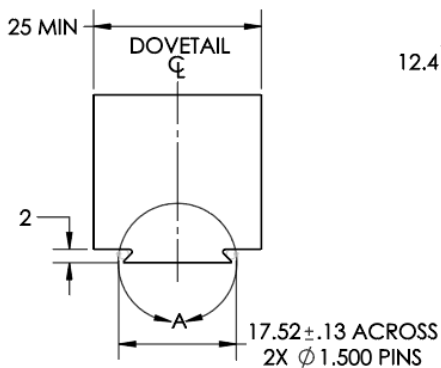


### MOUNTING PATTERN

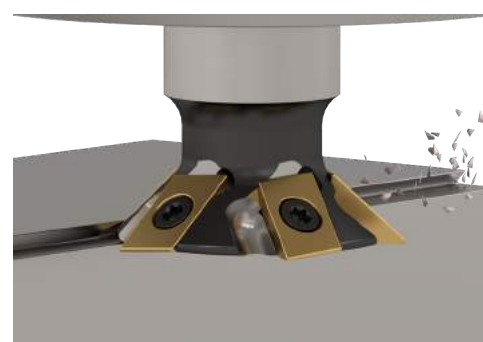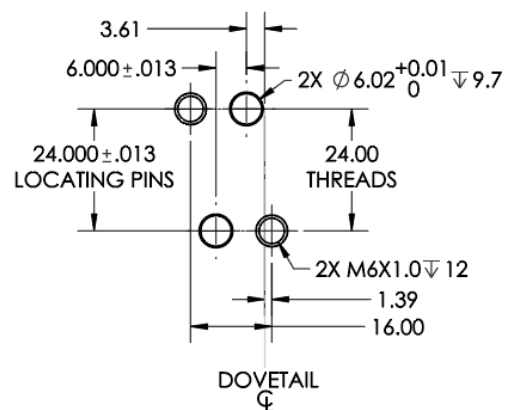

CER40



The CER40 is a quick and efficient fixture for holding round stock. The collet utilizes your existing set of standard ER40 collets allowing you to clamp different diameters of stock. The body is manufactured from hardened alloy steel to exacting standards.

| Part Number | R52-CER40                                                                           | R96-CER40                                                                             |
|-------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|             |  |  |
| Size        | 75mm X 75mm x 68mm                                                                  | 126mm x 126mm x 81mm                                                                  |
| Mounting    | Includes PS16F                                                                      | Includes PS20F                                                                        |
| Stock Size  | ER40 Collet                                                                         | ER40 Collet                                                                           |



## Dovetail Cutters



### DC1750-M

45° Indexable Dovetail Cutter, 25mm shank

All of our fixtures feature 45° dovetail.

### DC1750-60\*

60° Indexable Dovetail Cutter, 1" shank

Compatible with other 60° dovetail systems.

### DC1750-B

Inserts for Dovetail Cutter

Compatible with all 5th Axis dovetail cutters.

## Thumb Screws



### Replacement Thumbscrews:

**TS10** - Used on V75100X, V75150X, DV75150X

**TS13** - Used on DV56, DV510, V552M, V562M, and V510M

**TS17** - Used on V6105M

Thumb screws are included with every vise. Fits standard 3/8" drives.

## Threaded Locating Pins



### Replacement Locating Pins:

**LP6** - 6mm OD

**LP8** - 8mm OD

**LP10** - 10mm OD

Locating pins are included with every vise.

\*Inserts sold separately.

CAD models available for download at [fifthaxis.com/downloads](http://fifthaxis.com/downloads)





## Machinable 6061 Aluminum Jaws

### METRIC

**VAJ75X** - 75mm x 45mm x 25mm (Compatible with V75100 / V75100X)

**VAJ52M** - 125mm x 50mm x 34mm (Compatible with V552M / V562M / V510M)

**VAJ610M** - 151mm x 78mm x 47mm (Compatible with V6105M)



## Machinable 1018 Steel Jaws

### METRIC

**VSJ75X** - 75mm x 45mm x 25mm (Compatible with V75100 / V75100X)

**VSJ52M** - 125mm x 50mm x 34mm (Compatible with V552M / V562M / V510M)

**VSJ610M** - 151mm x 78mm x 47mm (Compatible with V6105M)



## DJ6 Gripper Jaws

**DJ6** - Compatible with standard 6" Kurt Vise.


The DJ6 gripper jaws with built-in 45° dovetails are the perfect accessory for your 6" machine vise. Jaws are heat treated and precision ground for superior repeatability and longevity. The jaws are 55 HRC, TiN coated and 25mm step depth.



## Narrow Jaws

**NT5-M** - Compatible with V552M / V562M / V510M

Our 76.2mm Narrow Jaws are perfect when requiring a little bit more clearance than the standard 125.73mm jaws.

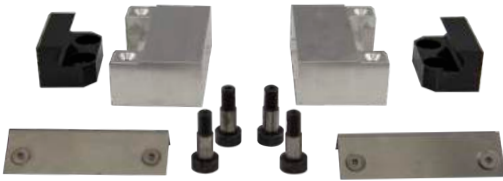

## Anti-Lift Jaws

**AL75A** - Anti-Lift Aluminum Machinable Jaws, Starter Set. Includes steel cleats, aluminum machinable jaws, and brackets. (Compatible with V75100, V75100X, V75150X)

**AL75-2A** - Set of 2, Replacement Anti-Lift Machinable Aluminum Jaws. (Compatible with V75100, V75100X, V75150X)

**AL75S** - Anti-Lift Steel Machinable Jaws, Starter Set. Includes steel cleats, steel machinable jaws, and brackets. (Compatible with V75100, V75100X, V75150X)

**AL75-2S** - Set of 2, Replacement Anti-Lift Machinable Jaws, Steel. (Compatible with V75100, V75100X, V75150X)

**AL52A** - Anti-Lift Aluminum Machinable Jaws, Starter Set. Includes steel cleats, aluminum machinable jaws, and brackets. (Compatible with V552 / V562 / V552M / V562M / V510M)


**AL52-2A** - Set of 2, Replacement Anti-Lift Machinable Aluminum Jaws. (Compatible with V552 / V562 / V552M / V562M / V510M)

**AL52-2S** - Set of 2, Replacement Anti-Lift Machinable Jaws, Steel. (Compatible with V552 / V562 / V552M / V562M / V510M)



Our Anti-Lift Jaws use a cleat and angled soft jaw to pull the jaw in and down when torque is applied to the lead screw. This design decreases jaw lift and jaw deflection commonly seen in self-centering vises.

# RockLock Examples

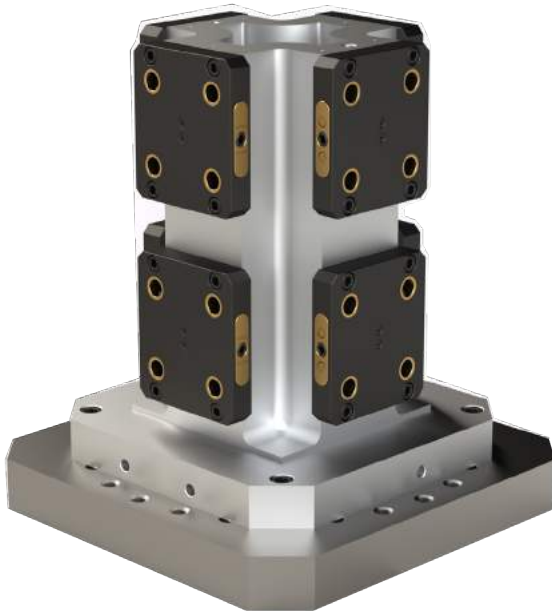

**400mm Tombstone configuration**

**Part number shown: RL96S -67M**

Built for standard tombstone and grid plates.  
Bolt spacing at 100mm.



**500mm Tombstone configuration**

**Part number shown: RL96S -67M**

Built for standard tombstone and grid plates.  
Bolt spacing at 100mm.



**R96-V75XT4 Tombstone configuration**

**Part number shown: R96 -V75XT4 with 4X DV75150X**

200mm tall mini tombstone designed to work with smaller 4 and 5 Axis machines.




**R96-V75100T4 Tombstone configuration**

**Part number shown: R96-V75100T4 with 8X V75100X**

266mm tall mini tombstone designed to work with smaller 4 and 5 Axis machines.


# RockLock Examples

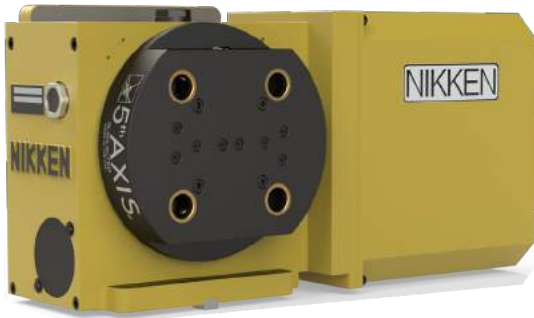

## Integrated faceplate configuration

**Part number shown: RL96S-NCT200**

Integrated RockLock 96mm faceplate for Nikken NCT200 rotary tables.

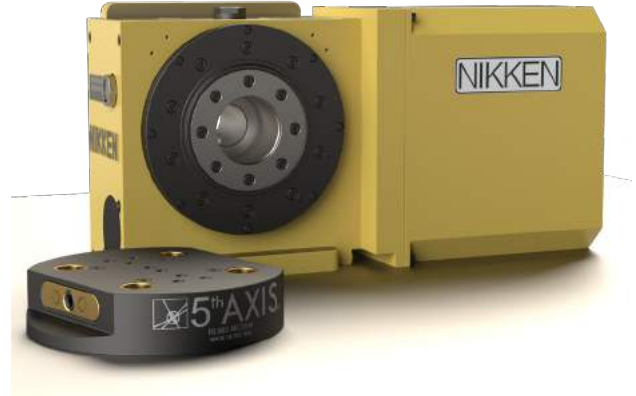

## Built for Nikken NCT200

**Part number shown: RL96S-NCT200**

Detachable faceplate bolts directly to Nikken NCT200 rotary and provides a low profile integrated 96mm RockLock quick change system.



## 4th Axis tombstone configuration

**Part number shown: R96-V75XT4 with 4x DV75150X + RL96A-56 adapter**

Turn your vertical with a rotary into a mini horizontal. Produce 8X the parts on your rotary table.



## Haas TRT160 configuration



**Part number shown: RL96A-60100**

New 4 bolt 96mm RockLock adapter. Designed for the new style Haas TRT160 rotary.

# BUILT FOR 3-AXIS

**Simplify Programming**


**Reduce Changeover Time**

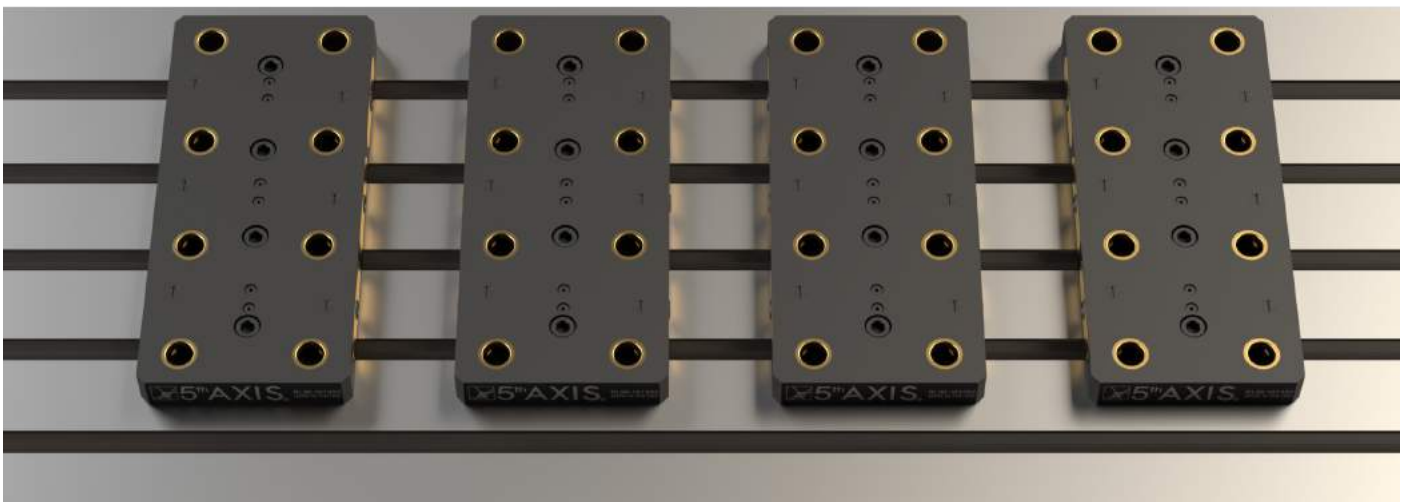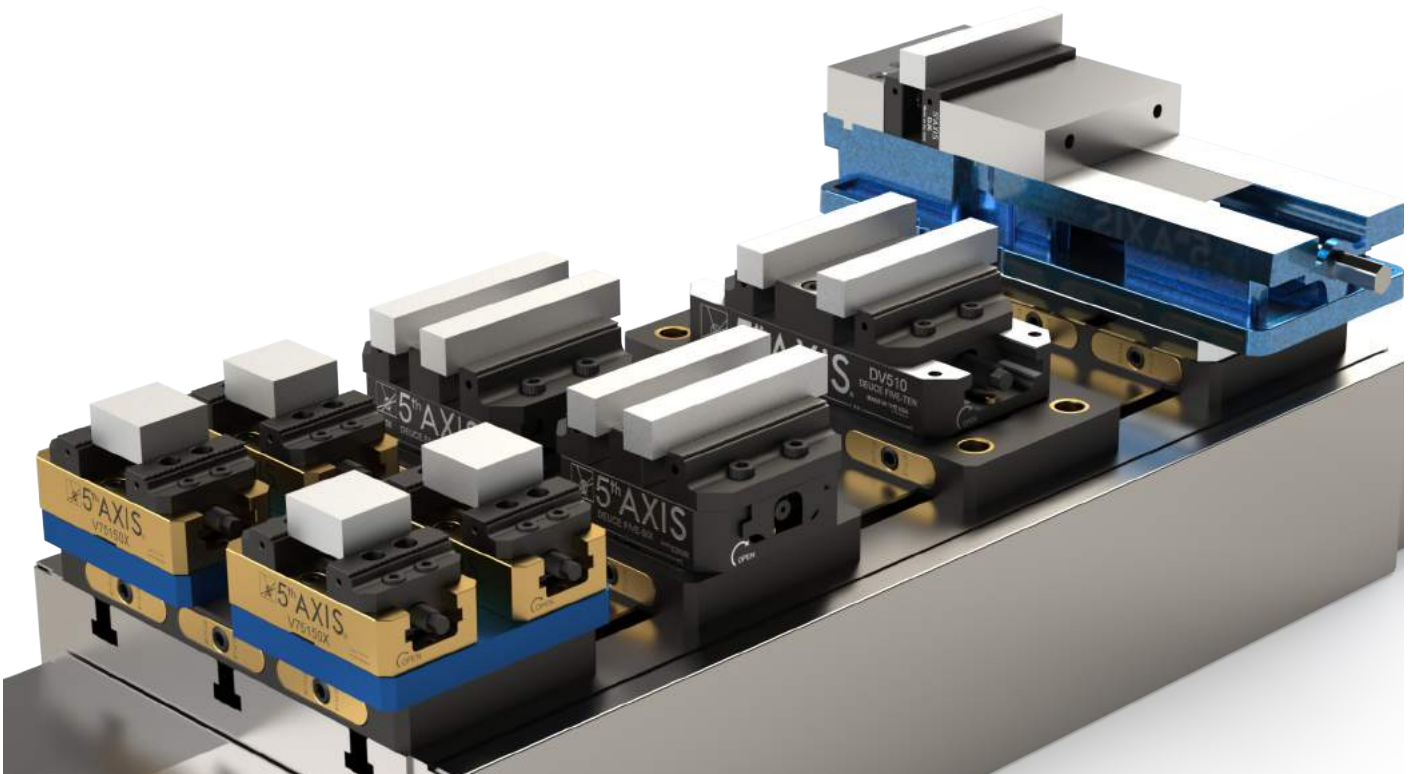





# READY TO ROCK SETUP

Example shown for Haas VF-2/VF-3 [G154 Work Coordinates]

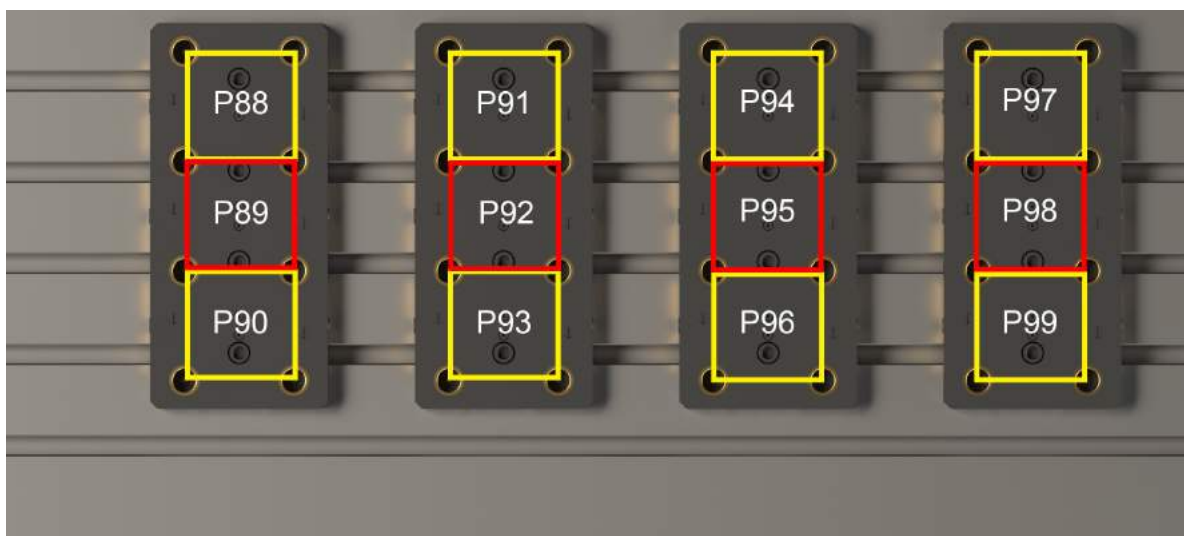

1. Starting with an empty machine table, install 5th Axis 3613S plates for your specific table. Thread bolts into t-nuts, but do not torque bolts.
2. Space plates 3" (76.2mm) apart from each other. Use a mallet to initially align and straighten plates.
3. Install master pallet (RL96-MP) in center position (P89, P92, P95, P98) to indicate straight. Once aligned and indicated straight, torque mounting bolts to torque specifications.
4. For every position, install master pallet and set X and Y axes with touch probe or indicator for each work offset position.
5. Set Z zero on the top mounting surface of the Rocklock 3613S base for all work **offsets**.
- 6. R2R system is ready to use.**

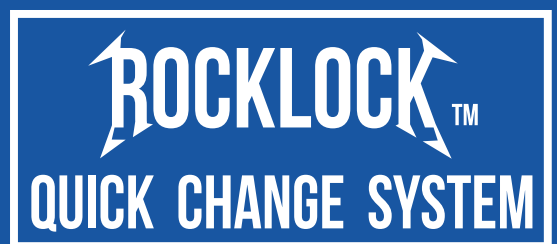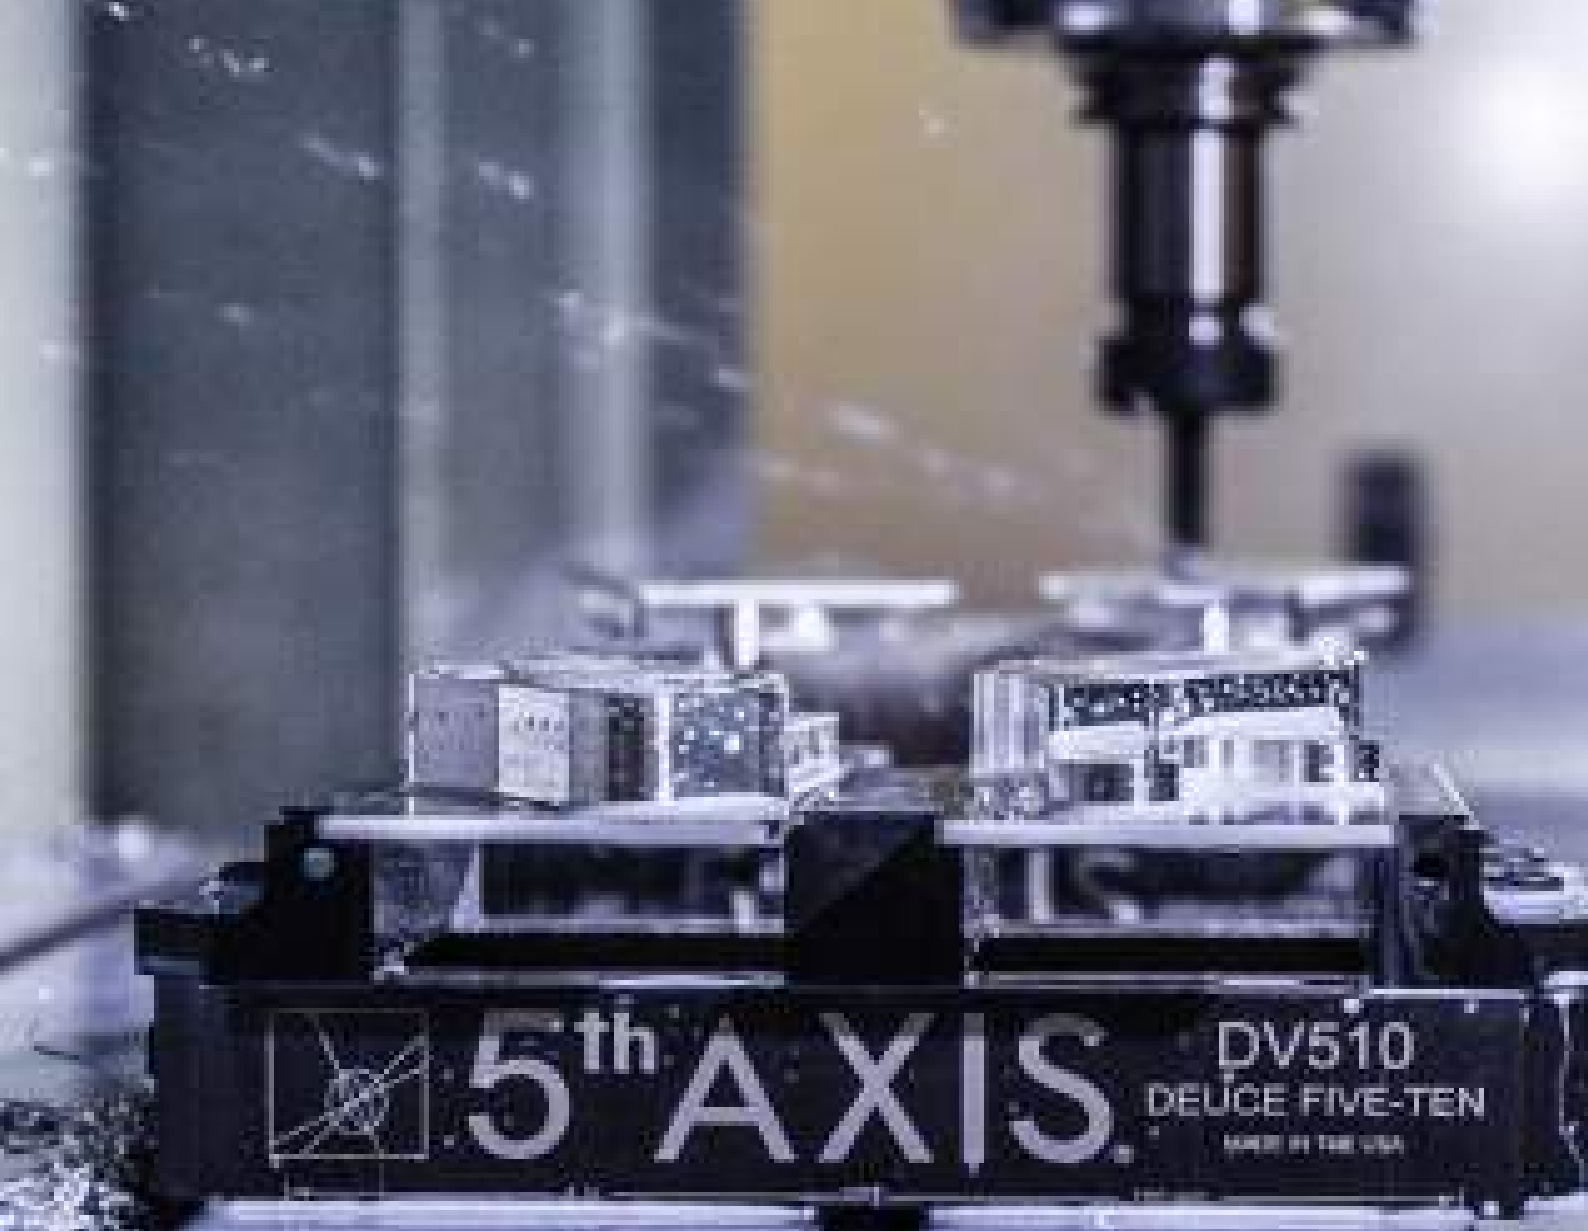

**Made in USA**



---

7140 Engineer Rd.  
San Diego, CA 92111  
p: 858-505-0432  
f: 858-505-9344  
e: [workholding@5thaxis.com](mailto:workholding@5thaxis.com)  
[5thaxis.com](http://5thaxis.com)